

CENTRAL VACUUM SYSTEMS

PRICE LIST









sistemairpro.com

INDEX

Vacpan

Outdoor

Industrial

Floor

DOMESTIC TRADITIONAL LINE		INSTALLATION MATERIAL
Tecno Prime	5	Main features
Tecno Evox	8	Installation kit
	C C	Installation for standard system
MINI LINE	40	Test
Tecno Style Mini	10	Remote connection
FLATS		STEEL
Wolly 2	12	Main features
Sistem Cube	14	Industrial installation
LARGE HOUSES		
Tecno Star Dual Power	16	SENSE RETRACTABLE HOSE SYSTEM
		Main features
PROFESSIONAL		Installation for retractable system Sense accessories
BASIC COMPACT UNITS		Selise accessories
Revo Job	18	
DIGITAL COMPACT UNITS		ACCESSORIES AND SPARE PARTS
Revo Block professional	20	Main features
		DOMESTIC CLEANING ACCESSORIES
		Natural Trendy brushes
INDUSTRIAL		Standard brushes
DUST SEPARATOR		Pipes and fittings
Industrial clean	22	PROFESSIONAL CLEANING ACCESSORIES
Basic separator	24	Oven Cleaning Kit
MOTORS		Brushes
Matic line	26	Pipes and fittings
Basic line	28	
SELF-CLEANING FILTER		CLEANING KIT On/Off wireless Flisy 2
Maxicleaner	30	Standard
Autocleaner	30	
		SPECIAL SEPARATOR
CYCLONIC PRE-SEPARATOR Turbix	22	Liquid and ash separators
Auto let Turbix	32 34	SPARE PARTS
Auto jet fulbix	54	Filters
MOTORISED HOSE REEL		Bags
Roll Flex	36	6 6
INDUSTRIAL COMPLEMENTS		
Master Line Professional	38	
INLET VALVES		
Main features	41	
RECTANGULAR		
Virtus	42	
Generation	44	
SQUARED		
Standard	46	SPARE PARTS
Design	46	
SPECIAL		Clean●●p ⊙ ;∰
	47	EASY CLEAN SHOP



EASY CLEAN SHOP



cleanoop.com

How the central vacuum system works

Detached houses, flats or small studios. Any building deserves to have the best cleaning system for those who live in it.

Not even small spaces or aesthetic constraints should be an obstacle to well-being. That is why a central vacuum system is for everyone.

Powerful, light and... clean that lasts longer

The central vacuum system radically changes the concept of cleaning. A revolution that starts with the inlet valves into which the vacuum hose is inserted, they are discreet and identical to the chosen interior design.

They are connected to each other by a pipe network that has the task of conveying the vacuumed material. It is realised underneath the ceiling, embedded in the false ceiling or, in the case of already finished homes, concealed with decorative plasterboard.

A central vacuum cleaner, either of the traditional type or built-in outside, collects the dirt in the dust container, without ever coming into contact with the user.

Lastly, as there is no recirculation of the vacuumed air in the room, the clean lasts longer. Saving time and effort.











C. Central vacuum cleaner

Living in a healthy house

The powerful suction of the system removes all traces of dirt and eliminates dust mites, allergens, dust pollutants, bacteria and viruses thanks to the external vent.



Micro-dust is expelled from the house through an external vent.

The exhaust air is pre-filtered. Only invisible particles, normally present in the air, are released into the atmosphere.





Always connected



Tecno Prime Central vacuum cleaner

Field of application:						
domesti	C					
houses, villas, shops						
Max. sur	face to be	e cleaneo	d: 450 m ²			
1 single	user	Ŧ				
Pipe network Ø 50 mm						
CE	IP44					



Tecno Prime is **the first internet-connected central vacuum cleaner** with **Air Cloud** personal maintenance assistant and 6-years kasko insurance.

Touch display and an innovative BiVac system offer **a** choice between bag filtration or the low-maintenance cyclonic filtration.

The Tecno Prime range of central vacuum cleaners **is specifically designed for domestic dust extraction**.

Available in four motorisation to clean the surfaces up to $450\ m^2$ for system used by a single user.



Learn more about Tecno Prime

Maximum surface to clean	Model	Article	Recommended inlet valves	Pkg	UM	Price
150 m²	Tecno Prime 150	3110.2TPR	4	1	рс	€ 1.610,00
250 m ²	Tecno Prime 250	3112.2TPR	7	1	рс	€ 1.790,00
350 m ²	Tecno Prime 350	3113.3TPR	11	1	рс	€ 2.020,00
450 m ²	Tecno Prime 450	3115.3TPR	16	1	рс	€ 2.280,00



Technical features

FEATURES

- Self-supporting cylindrical polipropylene and ABS body
- 21 l polypropylene dust container with PA6 nylon handles
- Soundproof motor compartment
- Single-phase brush-type electric motor
- Vacuum breaker valve
- Antistatic, class M certified filter
- Double protection electric control board, with fuses both on the main and secondary circuit
- On-board touch screen computer
- Pressure transducer to measure the efficiency status of the filter and dust bag level
- Soft Start system integrated in the mcroprocessor board
- Safety temperature sensor protection requiring manual reset
- Ethernet socket for Air Cloud internet connection
- On-board inlet valve only with cyclonic filtration
- Reversible system connection Rt/Lh

Technical data

.....



MODEL		Tecno Prime 150	Tecno Prime 250	Tecno Prime 350	Tecno Prime 450
ARTICLE		3110.2TPR	3112.2TPR	3113.3TPR	3115.3TPR
Micro-dust vent 🛛 🔍		YES	YES	YES	YES
Computer maintenance		YES	YES	YES	YES
Air inlet/Air discharge	Ømm	50	50	50	50
Power supply	V ac	220/240	220/240	220/240	220/240
Frequency	Hz	50/60	50/60	50/60	50/60
Motor power	kW	1,25	1,35	1,45	1,50
Absorption	А	5,0	5,6	6,3	6,5
Inlet valves power supply	V dc	12	12	12	12
Maximum air flow	m³/h	200	234	240	180
Maximum depression	mbar	274	272	310	400
Filtration class		М	М	М	М
Filtering surface	Cm ²	6700	6700	6700	6700
Dust container capacity	l	21	21	21	21
BiVac bag capacity	l	18	18	18	18
Air exhaust silencer Ø 50 mm		YES	YES	YES	YES
Weight	kg	17	17	17	18
Width	mm	380	380	380	380
Depth	mm	412	412	412	412
Height	mm	919	919	919	919
Minimum height from ground	mm	100	100	100	100
Noise level lower than	dB(A)		7	0	

P.N.: Rated noise values, may vary depending on environment and type of installation.

Antistatic filter

••••••••••••••••••

The filter is free from static charge build-up thanks to its connection to the plant's earthing system. The inverted conical shape, at the end of the vacuum process, allows everything that has settled on the surface of the filter to fall into the dust container. Washable and M class certified.

BiVac: choice of cyclonic or bag filtration

.....

Tecno Prime comes complete with the BiVac kit necessary to choose between two filtration options during installation.

Cyclonic filtration The vacuumed dust is filtered and separated from the air by the cyclone and falls into the dust container. With this configuration it is possible to use the inlet valve on the machine.

Bag filtration The microfibre bag retains the suctioned dust, making the filter cleaning unnecessary. With this configuration the inlet valve on the machine must be discarded.

Intelligent maintenance computer

From the touch display it is possible to access the functions dedicated to installation. This allows, through tests, to verify the correct functioning of the installation.

Also, maintenance intervals can be programmed, filter efficiency can be checked as also the dust container level.

Air Cloud Personal Maintenance Assistant

Air Cloud is the heart of the Tecno Prime central vacuum cleaner: it monitors health and prevents possible misfunctioning. An alert warns in the event of anomalies and you can choose whether to receive alerts directly or send them to your maintenance technician.

By keeping the Tecno Prime central vacuum always connected to the network, you get 6 year kasko cloud warranty.





On-board valve

On the vacuum body, there is a inlet valve for cleaning rooms adjacent to the point of installation (e.g. garages, cellars, etc.).

Always ready to use, simply insert the hose and start vacuuming from the display.











Tecno Evox Central vacuum cleaner



Field of application	ו:
domestic	
houses, villas, shops	
Max. surface to be	cleaned: 450 m ²
1 single user	*
Pipe network Ø 50	mm
CE IP20	

Tecno Evox is designed for a user who does not want to compromise on quality, underlined by the materials chosen and the careful assembly.

Power and reliability for those who seek an essential product but are not willing to compromise.

Available in four motorisations to clean surfaces up to 450 m^2 for system used by a single user.

FEATURES

- Self-supporting cylindrical polypropylene and ABS body
- 21 l polypropylene dust container with PA6 nylon handles
- Soundproof motor compartment
- Single-phase brush-type electric motor
- Vacuum breaker valve
- Class M certified filter
- Double protection electric control board, with fuses both on the main and secondary circuit.
- Soft Start system integrated in the mcroprocessor board
- Safety temperature sensor protection requiring manual reset
- On-board inlet valve
- Reversible system connection Rt/Lh





Learn more about Tecno Evox

Maximum surface to clean	Model	Article	Recommended inlet valves	PKG	UM	Price
150 m ²	Tecno Evox 150	3110.1TEV	4	1	рс	€ 1.490,00
250 m ²	Tecno Evox 250	3112.1TEV	7	1	рс	€ 1.670,00
350 m ²	Tecno Evox 350	3113.3TEV	11	1	рс	€ 1.890,00
450 m ²	Tecno Evox 450	3115.3TEV	16	1	рс	€ 2.150,00

Reversibility of connections

Tecno Evox is designed to easily connect the IN input and OUT discharge to the pipe network, either left or right.

Vacuum breaker valve

.....

The vacuum breaker valve opens automatically, supplying air to the motor when the flow from the intake pipe is reduced or absent, anticipating the intervention of the thermal protection.

Ergonomy and simplicity

Designed to be easy to use, it adopts a dust container with easy-to-operate hooks that act as handles to carry the dust container to the emptying point.

On board inlet valve

On the body, there is a inlet valve for cleaning rooms adjacent to the point of installation (e.g. garages, cellars, etc.). It is activated by pressing the 0/I switch on the front of the central vacuum cleaner.

Technical data

MODEL		Tecno Evox 150	Tecno Evox 250	Tecno Evox 350	Tecno Evox 450
ARTICLE		3110.1TEV	3112.1TEV	3113.3TEV	3115.3TEV
Micro-dust vent		YES	YES	YES	YES
Air inlet/Air discharge	Ømm	50	50	50	50
Power supply	V ac	220/240	220/240	220/240	220/240
Frequency	Hz	50/60	50/60	50/60	50/60
Motor power	kW	1,25	1,35	1,45	1,50
Absorption	А	5,0	5,6	6,3	6,7
Inlet valves power supply	V dc	12	12	12	12
Maximum air flow	m³/h	200	234	240	180
Maximum depression	mbar	274	272	310	400
Dust container capacity	l	21	21	21	21
Weight	kg	17	17	17	18
Width	mm	380	380	380	380
Depth	mm	412	412	412	412
Height	mm	919	919	919	919
Minimum height from ground	mm	100	100	100	100
Noise level lower than	dB(A)		7	0	

P.N.: Rated noise values, may vary depending on environment and type of installation.







Tecno Style Mini

Tecno Style Mini Central vacuum cleaner



Field of a	applicatio	on:			
domestic	:				
houses, flats, small spaces					
Max. surface to be cleaned: 150 m ²					
1 single user					
1 single ı	user	Ť			
1 single u Pipe netv		† D mm			

Tecno Style Mini is a powerful concentrate for installations in small spaces.

Even if smaller, suction power and comfort is kept. For those who do not want to compromise.

The Tecno Style Mini central vacuum cleaner is **designed specifically for domestic dust suction**.

Available in single motorisation with Mini body to clean surfaces $up\ to\ 150\ m^2$ for system used by a single user.

FEATURES

- Self-supporting cylindrical polypropylene and ABS body
- 15 l polypropylene dust container with PA6 nylon handles
- Soundproof motor compartment
- Single-phase brush-type electric motor
- Vacuum breaker valve
- Class M certified filter
- Double protection electric control board, with fuses both on the main and secondary circuit
- Soft Start system integrated in the mcroprocessor board
- Safety temperature sensor protection requiring manual reset
- Reversible system connection Rt/Lh





Learn more about Tecno Style Mini

Maximum surface to clean	Model	Article	Recommended inlet valves	Pkg	UM	Price
150 m ²	Tecno Style MINI	3107.1TER	4	1	рс	€ 1.060,00

sistemair.com

Main features

Compact dimensions

Tecno Style Mini offers all the power and effectiveness of cyclonic dust separation. The body of the central vacuum cleaner measures only 65 cm in height and 34 cm in depth.

The ideal choice for balconies, basements, hallways, wardrobes, small commercial spaces or other confined environments.

Reversible connections

Tecno Style Mini is designed to easily connect the IN input and OUT discharge to the pipe network, either left or right.

Compact filter

Tecno Style Mini is equipped with a high-performance, washable compact filter class M certified.

Ergonomicity and simplicity

Designed to be easy to use, it has a dust container with hooks that act as handles to carry the container to the emptying point.

Technical data



MODEL		Tecno Style Mini		
ARTICLE		3107.1TER		
Micro-dust vent		YES		
Air inlet/Air discharge	Ømm	50		
Power supply	V ac	220/240		
Frequency	Hz	50/60		
Motor power	kW	1,25		
Inlet valves power supply	V dc	12		
Maximum air flow	m³/h	200		
Maximum depression	mbar	274		
Dust container capacity	l	15		
Weight	kg	8,5		
Width	mm	340		
Depth	mm	345		
Height	mm	650		
Minimum height from ground	mm	100		
Noise level lower than	dB(A)	70		

P.N.: Rated noise values, may vary depending on environment and type of installation.







Wolly 2

Wolly 2 Central vacuum cleaner



Field of ap	plicatio	on:			
domestic					
flats, buildii	ngs				
Max. surfa	ice to be	e cleane	d: 300 m²		
1 single user 🛉					
Pipe network Ø 50 mm					
CE	IP44				

Wolly 2 is the ideal built-in **central vacuum cleaner for flats**. Super quiet and so compact that it fits everywhere.

Compatible with stringent energy and acoustic certifications thanks to the high-density polystyrene body that maintains the insulation of the wall where it is recessed.

Clean lines for a discreet aesthetic that blends in with any architectural design.

FEATURES

- PP-ABS plastic body
- Sound-absorbing case
- Microfibre filter bag (12 l capacity)
- Soundproof motor dome
- Single-phase brush-type electric motor
- Vacuum breaker valve
- Class M certified filter
- Soft Start system integrated in the mcroprocessor board
- Safety temperature sensor protection requiring manual reset
- Reversible system connection Rt/Lh





Learn more about Wolly 2

Maximum surface to clean	Model	Article	Recommended inlet valves	Pkg	UM	Price
150 m²	Wolly2 150	8201.0	4	1	рс	€ 1.070,00
300 m ²	Wolly2 300	8201.1	7	1	рс	€ 1.130,00

.....

MODEL		Wolly 2 - 150	Wolly 2 - 300
ARTICLE		8201.0	8201.1
Micro-dust vent 🛛 🔵		YI	ES
Air inlet/Air discharge	Ømm	5	0
Power supply	V ac	220,	/240
Frequency	Hz	50,	/60
Motor power	kVV	1,25	1,35
Maximum air flow	m³/h	200	234
Maximum depression	mbar	274	272
Inlet valves power supply	V dc	12	
Dust container capacity	l	1	2
Width	mm	430	
Height	mm	630	
Depth	mm	187	
Noise level lower than	dB(A)	7	0



Built-in

At only 18.7 cm deep, it combines with the aesthetics of the building façade.



Wall-mounted

Wolly 2 can also be installed against a wall.



The kit includes:

• central vacuum cleaner Wolly 2

- motor module (by choice up to 150 $m^2 \mbox{ or } 300 \mbox{ } m^2$
- Built-in box
- cleaning kit.

Wolly 2 comes with a kit for the main cleaning tasks.

In addition, the Mini accessory hook allows neat storage of the hose and accessories.

B Only predisposition

Built-in installation

Article	Description	Pkg	UM	Price
7102.1	Built-in box Wolly 2	1	рс	€ 236,00

Wall mounting installation

Article	Description	Pkg	UM	Price
7102.2	Outdoor installation frame Wolly 2	1	рс	€ 180,00
7102.1	Built-in Wolly 2*	1	рс	€ 236,00

*for wall mounting, insert the built-in box art. no. 7102.1 inside the frame

Finishing

Article	Description	Pkg	UM	Price
8202.0	Suction module/motor Wolly 2 mod. 150	1	рс	€ 720,00
8202.1	Suction module/motor Wolly 2 mod. 300	1	рс	€ 770,00

Sistem Cube

Sistem Cube Central vacuum cleaner



Field of application:						
domestic						
es						
e cleaned: 120 m ²						
1 single user 🛉						
Pipe network Ø 50 mm						

Sistem Cube is the world's smallest central vacuum cleaner for cleaning spaces up to 120 $m^{\rm 2}$ for system used by a single user.

A concentrate of healthiness and cleaning power that integrates into the under-sink or any available space thanks to its compact dimensions of 30x28x30 cm.

The **pre-wired template** makes installation quick and convenient. Squared design makes it elegant and discreet, the invisible cleaning companion.

The Sistem Cube central vacuum cleaner is **specifically designed for domestic dust vacuuming**.

FEATURES

- PP-ABS plastic body
- Dust filtering bag
- Motor safety filter
- Single-phase electric motor
- Soft Start system integrated in the mcroprocessor board
- Safety temperature sensor protection requiring manual reset
- Reversible system connection Rt/Lh





Learn more about Sistem Cube

Maximum surface to clean	Model	Article	Recommended inlet valves	Pkg	UM	Price
Max 120 m ²	Sistem Cube	8300.0	3	1	рс	€ 990,00

P.N.: Pre-wired template to be purchased separate.

MODEL		Sistem Cube
ARTICLE		8300.0
Micro-dust vent		YES
On-board vacuum valve		NO
Air inlet/Air discharge	Ømm	40*
Power supply	V ac	220/240
Frequency	Hz	50/60
Motor power	kW	1
Inlet valves power supply	V dc	12
Maximum air flow	m³/h	178
Maximum depression	mbar	245
Dust container capacity	l	15
Weight	kg	4
Width	mm	280
Height	mm	300
Depth	mm	300
Noise level lower than	dB(A)	70

P.N.: Rated noise values, may vary depending on environment and type of installation.

*the eccentric increase item 5040.1 must be purchased separately




Outdoor installation

The IPX4 degree of protection allows Sistem Cube to be installed outdoors without contraindications. When arranging the tubing and the pre-wired template, take the desired positioning into account.



Indoor installation

The compact dimensions of Sistem Cube allow it to be installed anywhere, even inside furniture. The chosen room can be without ventilation, as the direct cooling motor uses air from the inlet valves.

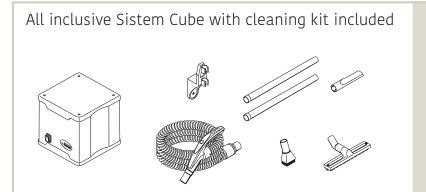

The kit includes:

- brush for floors and hard surfaces
- corner lance
- dusting brush.

Sistem Cube is supplied with a kit for the main domestic cleaning tasks.

In addition, the Mini accessory hook allows neat storage of the hose and accessories.



Article	Description	Pkg	UM	Price
8300.10	Wall pre-wired template for Sistem Cube*	1	рс	€ 97,00

*To be purchased separately

Tecno Star Dual Power Central vacuum cleaner



Field of application:						
domestic						
large hou	large houses, semi-detached villas,					
B&Bs, sho	B&Bs, shops, small workshops					
Max. surface to be cleaned: 450 m ²						
up to 2 ι	up to 2 users					
Pipe network Ø 63 mm						
CE	IP20					

Tecno Star Dual Power is the domestic central vacuum cleaner that allows **up to 2 users to use the system at the same time**.

Semi-professional core, powered by a pair of brush motors, and predisposed for the integration of the Autocleaner automatic filter cleaning system.

Ideal for spacious houses **up to 450 m**², **two-family solutions**, **bed & breakfasts and shops**.

FEATURES

- Cylindrical epoxy powder-coated body
- Shock-proof coated base
- 62 l metal dust container on wheels
- Bag tightener
- Single-phase electric motor
- Soundproofing for each individual motor
- Vacuum breaker valve
- Class M certified filter
- Filter protection flange
- Double protection electric control board, with fuses both on the main and secondary circuit
- On-board computer
- Soft Start system integrated in the mcroprocessor board
- Provision for Autocleaner automatic filter cleaning system
- Reversible system connection Rt/Lh





Learn more about Tecno star

Maximum surface to clean	Model	Article	Recommended inlet valves	Pkg	UM	Price
450 m ²	Tecno Star Dual Power	3116.2TS	16	1	рс	€ 4.550,00

On board intelligent computer

The electronic board with microprocessor connected to the pressure sensors can provide real-time readings. Tecno Star Dual Power detects:

- dust container level
- filter consumption status
- general efficiency level of the system
- vacuum pressure value in the system
- scheduled maintenance
- switch-on hours
- power consumption

Filter protection flange

A steel flange is attached to the body of the central vacuum cleaner to protect the filter. This protects the filter cartridge from wear and tear even when sucking in large amounts of dust or in the presence of abrasive residue.

Dust container on wheels

The Tecno Star Dual Power dust container is equipped with wheels that make it easy to move it to the emptying point.


It is equipped with a simplified release system, with a handle covered in shockproof material, which allows the dust container to be emptied effortlessly.

Autocleaner automatic filter cleaning system

.....

Tecno Star Dual Power is predisposed for installation of the Autocleaner system, art. no. 3600.0U (optional to be purchased separately), for automatic filter cleaning. For more details see Autocleaner section page 30

Technical data



MODEL

ARTICLE		3116.2TS
Micro-dust vent		YES
Computer maintenance		YES
Air inlet/Air discharge	Ømm	63
Power supply	V ac	220/240
Frequency	Hz	50/60
Motor power	kW	1,35 x 2
Inlet valves power supply	V dc	12
Maximum air flow	m³/h	390
Maximum depression	mbar	285
Dust container capacity	l	62
Weight	kg	55
Width	mm	615
Height	mm	1369
Depth	mm	600
Noise level with 1 motor	dB(A)	64
Noise level with 2 motors	dB(A)	69

P.N.: Rated noise values, may vary depending on environment and type of installation.







Tecno Star Dual Power

Revo Job Central vacuum cleaner



Field of application:

professional workshops, garages, tyre shops,



accommodation facilities

Max. surface to be cleaned: 3000 m²

A

up to 3 users

Pipe network Ø 63 mm - Ø 80 mm

CE IP20

Revo Job is the professional central vacuum cleaner for **up to 3 users at the same time**.

Professional, maintenance-free motor for maximum reliability. Automatic filter cleaning system by vibration included.

Ideal for large areas and professional applications where a compact central vacuum cleaner is required.

FEATURES

- Epoxy powder-coated metal body and base, coated with impact-resistant material
- 70 l metal dust container on wheels
- Bag tightener
- Side channel motor-pump unit, with light alloy casing, high performance and maintenance-free
- Automatic adjustment of vacuum power-inverter (Revo Job 4 kW only)
- Vacuum breaker valve
- Class M certified filter
- Filter protection flange
- Automatic filter cleaning system by vibration
- Termal magnetic protection
- Reversible system connection Rt/Lh





Learn more about Revo Job

Maximum surface to clean	Model	Article	Recommended inlet valves	Pkg	UM	Price
Max 2000 m ²	Revo Job 3 kW	3201.2J	2	1	рс	€ 7.100,00
Max 3000 m ²	Revo Job 4 kW	3201.6J	3	1	рс	€ 9.750,00

*Check with the technical department for conditions of use.

Filter protection flange

A steel flange is attached to the body of the central vacuum cleaner to protect the filter. This protects the filter cartridge from becoming worn out even when sucking in large amounts of dust or in the presence of abrasive residue.

Vibration self-cleaning

Filter cleaning system by means of vibration cycles of the filter cartridge that are activated each time the vacuum is switched off. Allows reduction of the cleaning frequency of the filter surface.

Strong and essential

The construction solutions adopted make it an extremely rational machine, designed for particularly heavy-duty situations, where electronic management of performance is not fundamental, preferring robustness and simplicity of use. Even in the 4 kW version, equipped with an inverter with a selection of three suction powers, the control board on the central unit makes switching the suction power as simple as possible.










Tecnical data



Model		Revo Job 3	Revo Job 4
Article		3201.2J	3201.6J
Intake connection	Ømm	80	80
Exhaust air	Ømm	80	80
Power supply	V ac	400	400
Frequency	Hz	50/60	50/60
Motor power	kW	3	4
Inlet valves power supply	V dc	12	12
Electronic speed converter		NO	YES
Maximum air flow	m³/h	414	570
Automatic filter cleaning by v	vibration	YES	YES
Dust container capacity	l	70	70
Air vent		YES	YES
Weight	kg	100	105
Width	mm	570	570
Height	mm	1625	1625
Depth	mm	630	630
Motor noise	dB(A)	60-	÷80

 ${\bf P.N:}$ Rated noise values may vary depending on the environment in which the control unit is installed and the type of installation

sistemair.com

Revo Block professional Central vacuum cleaner



Field of a	applicatio	on:	
professio	onal		
workshop	s, accomm	odation	
facilities,	office build	dings, large	villas
Max. sur	face to be	e cleaned:	3000 m²
up to 3 ι	isers	* * *	
Pipe net	work Ø 63	3 mm - Ø 8	80 mm
CE	IP20		

Revo Block is the professional central vacuum cleaner that allows up to 3 users at the same time.

Optimised consumption thanks to suction power management.

FEATURES

- Cylindrical epoxy powder-coated body
- Shock-proof coated base
- 80/106 l metal dust container
- Bag tightener
- Side-channel motor-pump ground with light alloy case, high performance and maintenance-free
- Automatic adjustment of vacuum power inverter (except Revo Block 700 Plus)
- Touch screen on-board computer
- Mechanical breaker valve
- Class M certified filter
- Filter protection flange
- Possibility to combine with Autocleaner, the automatic filter cleaning system
- Thermal magnetic protection
- Reversible system connection Rt/Lh





Learn more about Revo Block Professional

Maximum surface to clean	Model	Article	Maximum number of user	Pkg	UM	Price
Max 700 m ²	Revo Block 700 Plus	3213.2B	2	1	рс	€ 8.100,00
Max 1000 m ²	Revo Block 1000	3203.3B	2	1	рс	€ 8.350,00
Max 1200 m ²	Revo Block 1200	3203.4B	2	1	рс	€ 8.700,00
Max 1500 m ²	Revo Block 1500	3203.5B	2	1	рс	€ 10.100,00
Max 1800 m ²	Revo Block 1800	3203.6B	3	1	рс	€ 11.600,00

It can be combined with (page 30)

Touch Screen user interface

A real computer that manages all the control unit's functions: adjustment of suction power, energy saving, operating parameters and maintenance alerts.

With the possibility of connecting the control unit to a remote PC, present on the same network, to remotely monitor the control unit (Master Control system, optional, see page 55)



Soft touch container release mechanism

You don't need your strength, just Sistem Air's. We have developed a dust container release mechanism that guarantees solidity and a perfect hold without requiring any effort to release and hook the container.

Compact without sacrificing performance


It is a compact unit, but thanks to its professional motor and intelligent performance management it has all the features to be used on large surfaces even with several users at the same time. The possibility of fitting the automatic filter cleaning system using compressed air (Autocleaner, optional on page 30) completes the PRO soul of this central unit.







Tecnical data



Model		Revo Block 700 Plus	Revo Block 1000	Revo Block 1200	Revo Block 1500	Revo Block 1800
Article		3213.2B	3203.3B	3203.4B	3203.5B	3203.6B
Computer maintenance		YES	YES	YES	YES	YES
Intake connection	Ømm	63(*)	63(*)	63(*)	63(*)	80
Air exhaust	Ømm	63	63	63	63	80
Power supply	V ac	400	220/240	400	400	400
Frequency	Hz	50/60	50/60	50/60	50/60	50/60
Motor power	kW	3	2,2	2,2	4	4
Inlet valves power supply	V dc	12	12	12	12	12
Speed electronic converter		NO	YES	YES	YES	YES
Maximum air flow	m³/h	400	366	366	471	570
Dust container capacity	l	106	106	106	106	106
Air vent		YES	YES	YES	YES	YES
Weight	kg	95	95	95	105	115
Width	mm	750	750	750	750	750
Height	mm	1616	1616	1616	1616	1616
Depth	mm	750	750	750	750	750
Motor noise	dB(A)			60÷80		

P.N: Rated noise values may vary depending on the environment in which the control unit is installed and the type of installation

*models supplied with increase 63/80 to connect the control unit to the pipework.

Industrial Clean Separators



Field of a	pplication:		
industria			
hotels, ind	s,		
shopping c	entres		
Max. surf	ace to be cl	eaned: unl	imited
Up to 8 u	sers 🕴	* * * * *	* * * *
Pipe netv	vork Ø 80 n	nm - Ø 100	mm
CE	IP20		

The dust separators of the Industrial Clean line have an on-board computer that is able to control the entire industrial vacuum unit.

Each separator can control up to 8 motors, allowing large areas to be covered with maximum efficiency and simplicity in a single system.

Vacuumed material is collected to minimise maintenance operations

FEATURES

- Cylindrical epoxy powder-coated body
- Shock-proof coated base
- Metal dust container with wheels (capacity 80/106 litres)
- Bag tightener
- On-board touch screen computer
- Mechanical breaker valve
- Class M certified filter
- Filter protection flange
- Possibility to combine with Autocleaner, the automatic filter cleaning system (see on page 30)
- Reversible system connection Rt/Lh

Industrial Clean



Learn more about Industrial Clean

Model	Article	Maximum numbers of users with flexible hose Ø 32	Maximum numbers of users with flexible hose Ø 40	Pkg	UM	Price
Industrial Clean Small	3403.0	4	3	1	рс	€ 4.050,00
Industrial Clean Big	3403.1	8	4	1	рс	€ 5.460,00

It can be combined with Autocleaner (page 30)

Touch Screen user interface

A real computer that manages all the control unit's functions: adjustment of suction power, energy saving, operating parameters and maintenance alerts.

With the possibility of connecting the control unit to a remote PC, present on the same network, to remotely monitor the control unit (Master Control system, optional, see page 55)



Soft Touch container release mechanism

You don't need your strength, just Sistem Air's. We have developed a dust


container release mechanism that guarantees solidity and a perfect hold without requiring any effort to release and hook the container.


Limitless modular system

The possibility of combining several motors to a single separator gives the system extraordinary flexibility of use, making it suitable for use, with numerous advantages, in different situations:

- surfaces of several thousand square metres
- suction of solids and liquids other than dust
- possibility of total and partial selective collection of sucked materials

Tecnical data



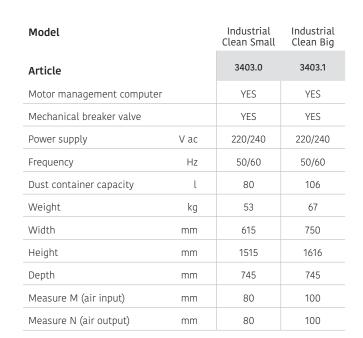








Basic Separator

Basic

Basic Separators



industrial hotels, industries, museums,



cinemas, shopping centres

Max. surface to be cleaned: unlimited

Up to 8 users

Pipe network Ø 60 - Ø 80 - Ø 100 mm

CE

The dust separators of the Basic line are designed as basic filtration units, without any kind of electronic control either on the connected motors or on the operating vacuum of the system.

This is a product dedicated to special applications, where there is a suction unit with separate power regulation.

PN: it is not possible to install the Autocleaner self-cleaning system on the Basic line separators.

FEATURES

- Metal cylindrical frame painted with epoxy powder
- Case coated with anti-shock material to protect the vacuum unit
- Metal dust container from 40/80/106 l
- Bag tightener
- Safety vacuum breaker valve
- Class M certified filter
- Filter protection flange
- Reversible system connection Rt/Lh



Learn more about Industrial Clean Basic

Model	Article	Inlets IN/OUT Ø mm	Pkg	UM	Price
Wall separator LT40	3400.40	60	1	рс	€ 1.700,00
Basic separator LT80	3400.20	80	1	рс	€ 2.700,00
Basic separator LT160	3400.21	100	1	рс	€ 3.500,00

Soft Touch container release mechanism

On the two separators with the larger capacity dust container, you don't need your strength, just Sistem Air's. We have developed a dust container release mechanism that guarantees solidity and a perfect hold without requiring any effort to release and hook the container.

Filter protection flange

A steel flange is attached to the body of the central vacuum cleaner to protect the filter. This protects the filter cartridge from becoming worn out even when sucking in large amounts of dust or in the presence of abrasive residue.

Modular system

Industrial plants have no limits: the system is modular and can be adapted to any specific situation.

Possibility of combination with Turbix

Designed as basic filtration elements, all separators in the Basic line can be combined with an appropriately sized Turbix cyclonic pre-separator to minimise filter maintenance of the separator, resulting in a basic but highly effective filtration unit.








PROFESSIONAL INDUSTRIAL

Tecnical data

 \odot

•



Model		Wall separator LT40	Basic LT 80	Basic LT160
Article		3400.40	3400.20	3400.21
Motor management computer		NO	NO	NO
Filter protection grid		YES	YES	YES
Safety vacuum breaker valve		NO	YES	YES
Bag tightener		YES	YES	YES
Filtering surface	CM ²	19600	24000	43400
Dust container capacity	l	40	80	106
Air input	mm	60	80	100
Air output	mm	60	80	100
Weight	kg	18	53	67
Width	mm	390	615	750
Height	mm	1055	1515	1616
Depth	mm	390	745	745

Wall

Industrial Motor Matic Motors



Field of application:

industrial hotels, industries, museums, cinemas, shopping centres



* * * * * *

Max. surface to be cleaned: unlimited

Up to 6 users

CE

Pipe network Ø 63/80/100 mm

IP20

The motors of the Industrial Motor Matic line offer extraordinary vacuum power in all conditions of use. The presence of the inverter allows modulation both to adapt to different situations and to limit power consumption. The thermal probe is an additional safety feature, in addition to the electronic ones, to guarantee motor reliability.

FEATURES

- Metal frame painted with epoxy powder
- Side-channel motor-pump group with light, highperformane and maintenance-free
- Electronic speed converter
- Thermal magnetic circuit breakers
- Multiple motor installations, with several motors connected to each other





Learn more about Industrial Motor

Model	Article	Maximum numbers of users with flexible hose Ø 32	Pkg	UM	Price
Industrial Motor Matic 2,2 kW	3503.2M	1	1	рс	€ 7.000,00
Industrial Motor Matic 4 kW	3513.4M	2	1	рс	€ 8.600,00
Industrial Motor Matic 5,5 kW	3503.6M	3	1	рс	€ 10.700,00
Industrial Motor Matic 7,5 kW	3503.7M	4	1	рс	€ 13.250,00
Industrial Motor Matic 11 kW	3503.11M	6	1	рс	€ 15.700,00

Integrated silencers

In the side intake and exhaust ducts of blower engines, there are silencers that reduce the noise caused by the turbulence of the passing air. Additional silencers can be added to further reduce motor noise.


Electronic speed converter

The inverter on the Matic motors, intelligently controlled by the dust separator, is guided by specific programming developed by Sistem Air, which allows the best possible vacuum performance to be achieved, avoiding critical working conditions and the potential risk of damage to electronic components.

Easy connection

A simple serial cable is all that is needed to connect the different motors and the dust separator together: through it, all the information needed to recognise the motors and control them optimally will reach the computer board on the dust separator.

Tecnical data

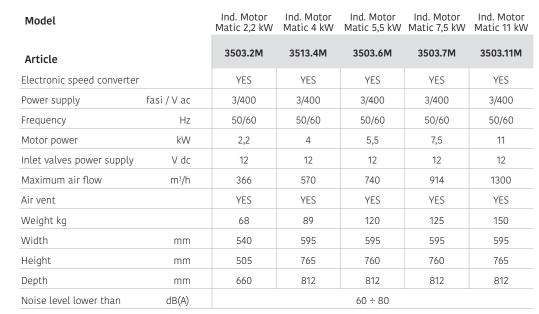

P.N: Rated noise values may vary depending on the environment in which the control unit is installed and the type of installation





Industrial motor Motors



Field of application:

industrial hotels, industries, museums,



 (\square)

cinemas shopping centres

Max. surface to be cleaned: unlimited

Up to 3 users

Pipe network Ø 80 mm

IP20

CE

The motors in the Industrial Motor line do not have an inverter, so it is not possible to modulate the suction force. They are used in combination with Industrial Clean Basic separators to obtain basic suction units without electronic control, suitable for working in adverse environmental conditions or where modulation of the suction force is not required.

FEATURES

- Metal frame painted with epoxy powder
- Side-channel motor-pump group with light, highperformane and maintenance-free
- Thermal magnetic circuit breakers
- Multiple motor installations, with several motors connected to each other





Learn more about Industrial Motor

Model	Article	Maximum numbers of users with flexible hose Ø 32	Pkg	UM	Price
Industrial Motor 4 kW	3500.3M	2	1	рс	€ 6.950,00
Industrial Motor 5,5 kW	3500.5M	3	1	рс	€ 9.000,00

Integrated silencers

In the side intake and exhaust ducts of blower engines, there are silencers that reduce the noise caused by the turbulence of the passing air. Additional silencers can be added to further reduce motor noise.

Thermal-magnetic protection

All motors have a thermal-magnetic circuit breaker integrated in the control panel.

The presence of the micro line cut-off switch provides additional protection on the motor's electrical system and makes it easier to detect any faults.

Possibility of multiple installations

By connecting these motors to a suitable control panel, it is possible to use several suction units connected to a single separator (Basic type) in order to still have a variable suction power.

Tecnical data

۹		P

Model		4 kW	5,5 kW	
Article		3500.3M	3500.5M	
Electronic speed converter		NO	NO	
Power supply	fasi / V ac	3/400	3/400	
Frequency	Hz	50/60	50/60	
Motor power	kW	4	5,5	
Absorption	А	8,1	11,1	
Inlet valves power supply	V dc	12	12	
Maximum air flow	m³/h	414	536	
Air vent		YES	YES	
Weight kg		79	110	
Width	mm	540	595	
Height	mm	560	765	
Depth	mm	685	812	
Noise level lower than	dB(A)	60 ÷ 80		

 ${\bf P.N:}$ Rated noise values may vary depending on the environment in which the control unit is installed and the type of installation







Autocleaner Maxicleaner Self-cleaning system





Thanks to a flow of compressed air through the filter in the opposite direction to the suction, the dust will be detached from its walls and fall into the dust container.

Available in two models, they can be installed at the same time as the central vacuum cleaner or can be added later on (see technical data).

FEATURES

- Self-supporting epoxy powder-coated metal body
- Thermoformed protective coating (Autocleaner)
- Integrated compressed air tanks
- Safety valve
- Activation solenoid valve
- Multipolar connector
- Integrated compressor (only for Autocleaner)
- Supplied complete with camera body mounting bracket







Learn more about Autocleaner

Model	Article	Pkg	UM	Price
Maxicleaner applicable on: - Revo Block Professional - Dust separators Industrial Clean Line	3600.2U	1	рс	€ 2.970,00
Autocleaner applicable on: - Tecno Star Dual Power - Revo Block Professional - Dust separators Industrial Clean Line	3600.0U	1	рс	€ 2.970,00

Automatic and fully programmable

Once the self-cleaning system is installed, simply activate it via the display of the central vacuum cleaner or dust separator to configure

- the number of cycles of the system;
- the definition of the operating time bands, according to the customisations requested by the user (e.g. exclusion of night hours);

Automatic filter cleaning: two solutions

.....

Sistem Air's professional line has two types of automatic filter cleaning systems, to be chosen according to installation requirements.

Maxicleaner: in the case of particularly fine dust or dust vacuumed in large quantities, this is the ideal accessory for self-cleaning the filter. It does not have an integrated compressor, but must be connected to a compressed air supply line in the building. In this way, high pressures can be achieved which, combined with the large capacity of the pressure air storage tank, always allow the filter surface to be freed of dirt.


Autocleaner does not need to be connected to external self-cleaning sources. It has everything needed to effectively clean the filter in the case of dust that is not extremely fine or such that it does not compact on the filter walls.







Tecnical data



MODEL		Maxicleaner	Autocleaner	
ARTICLE		3600.2U	3600.0U	
Air input	Ø"	3/8 G	_	
Air output	Ø"	3/4"	3/4"	
Protection class	IP		40	
Power supply	V ac	220/240	220/240	
Frequency	Hz	50	50/60	
Power	W	-	250	
Absorption	А	-	1,3	
Air pressure	bar	3,5	3,5	
Tank capacity	l	37	6	
Height	mm	1035	730	
Width	mm	253	328	
Depth	mm	300	220	

Turbix

Turbix Cyclonic separators

Field of application:

domestic and professional



workshops, industries, museums, cinemas

Pipe network Ø 50 - 63 - 80 - 100 mm

CE



Turbix are cyclonic pre-separators useful for intercepting more than 98% of sucked dust and preserving the filter, reducing maintenance cycles and maintaining the performance of the central vacuum cleaner.

FEATURES

- Metal body and base epoxy powder-coated
- Dust container: Turbix Small 21 l polypropylene with handles Turbix Medium 40 l metal with handles Turbix Big 70 l metal with wheels Turbix Big XL 106 l metal with wheels
- Reversible system connection Rt/Lh





Learn more about Turbix

Model	Article	Inlets IN/OUT Ø mm	Pkg	UM	Price
Turbix Small Ø 50 mm	3400.10	50	1	рс	€ 670,00
Turbix Medium Ø 60 mm	3400.11	60	1	рс	€ 850,00
Turbix Big Ø 80 mm	3400.12	80	1	рс	€ 2.550,00
Turbix Big XL Ø 100 mm	3400.13	100	1	рс	€ 3.700,00

.....

Cyclonic separation

The filtration of the air from the suctioned dust takes place by cyclonic separation. The shape of the cone gives the suctioned dust a cyclonic motion with increasing speed. At the end of the cone, the air slows down and allows the dust to fall into the Turbix dust container without fouling the central vacuum cleaner filter.

A guarantee of effectiveness but, above all, a simplification in maintenance. Turbix contains no filter cartridge.

Great effectiveness


With Turbix, suction has no limits. you can remove any type of material, even the finest and dustiest, such as:

- Animal hair
- Flours
- Hair
- Soil
- Metal shavings
- Plastic granulates
- Grinding dusts
- Sawdust

Soft Touch container release


On both the smaller separators (Small and Medium for wall mounting) and the larger ones (Big and Big XL), we have developed a dust-container release mechanism that guarantees solidity and a perfect hold without requiring any effort to release and hook the dust container.







Tecnical data



Model		Turbix Small	Turbix Medium	Turbix Big	Turbix Big XL
Article		3400.10	3400.11	3400.12	3400.13
Dust input/output	Ømm	50	60	80	100
Dust container capacity	l	21	40	70	106
Weight	kg	15	25	53	70
Width	mm	385	452	552	680
Depth	mm	360	436	590	700
Height	mm	855	1105	1395	1600
Minimum height from ground	mm	100	100	-	-

Auto Jet Turbix Separator

industrial

industries, laboratories



Pipe network Ø 80 mm

Output opening Ø 153 mm





The special Auto Jet Turbix separator is designed for use in all applications where the capacity of the collection container is not sufficient to hold all the material sucked during a work cycle. The automatic opening system of the collection container door allows the contents to be discharged in a customised manner, thus avoiding frequent machine downtimes. The presence of the cyclonic cone allows effective dedusting of the sucked air, thus prolonging the efficiency of the filter in the central vacuum cleaner.

FEATURES

- Cyclonic separation without filter
- Made of stainless steel
- Reversible pipe connections
- Easy to install and use

AUTO Jet TURBIX



Learn more about Auto Jet

Model	Article	Inlets IN/OUT Ø mm	Discharge Ø mm	Pkg	UM	Price
Auto Jet Turbix	7010.3	80	153	1	рс	€ 7.850,00

Main features

.....

Guaranteed opening

The lower door is operated by a robust pneumatic actuator, which allows it to be opened under all loading conditions, so that the material in the collection container can always be unloaded.

Easy unloading by means of 8 air jets

To facilitate the discharge of all types of sucked material, even the lightest and bulkiest, the separator is equipped with 8 nozzles that trigger a jet of compressed air when the discharge flap is opened.


Easy to programme

Thanks to the three potentiometers on the control panel, the following operating parameters can be adjusted:

- 1. suction time (to prevent overfilling of the container);
- door opening time (to be set according to the specific weight and consistency of the material sucked in);
- 3. repetition of compressed air jets acting during discharge.

Using the TEST button it is possible to test each of these three settings immediately in order to find the optimal setting according to the quantity and type of material sucked.

Tecnical data



Model		Auto Jet Turbix
Article		7010.3
Vacuum management board		YES
Protection class	IP	44
Power supply	V ac	230
Absorption	А	1,5
Container capacity	l	76
Pneumatic actuator pressure	bar	6
Air input	G	3/4
Nozzle pressure		*
Weight	kg	105
Width	mm	740
Height	mm	1760
Depth	mm	740


*Same maximum operating pressure as system







Roll Flex Motorised hose reel





Roll Flex is the motorised hose reel designed by Sistem Air to simplify the use of the centralised vacuum system in all those situations where it is necessary to cover a large area with a single hose, reducing plant complexity and possible floor space requirements. The robust gearmotor mechanism makes it particularly suitable for use in professional and industrial environments.

FEATURES

- Roll Flex is equipped with a motorised unwinding/ rewinding system, characterised by extreme robustness, thanks to the use of professional mechanical and electrical components
- Simple to use: two microswitches control the direction of rotation of the winder. Starting and stopping the suction are automatic
- Ceiling-mounted (or wall-mounted with optional bracket)





Learn more about Roll Flex

Model	Article	Hose supplied Ø mm	Pkg	UM	Price
Roll Flex Ø 32	7041.51E	35	1	рс	€ 1.910,00
Roll Flex Ø 40	7041.61E	40	1	рс	€ 2.150,00

Main features

Customisable controls

The control panel supplied as standard can be extended or replaced with other devices for remote control also via radio, introducing, for example, timings on vacuum cleaner operation. This allows maximum adaptation of the system to the needs of each specific application.


Sturdy and safe

The unwinding/rewinding mechanism is of a professional type, capable of performing several work cycles without any problems. At the same time it is equipped with safety devices to prevent accidental lifting of large objects.






Tecnical data



Model Roll Flex Roll Flex Ø 40 Ø 32 Article 7041.51E 7041.61E Protection class IP 40 40 V ac 220/240 Power supply 220/240 50/60 50/60 Frequency Ηz Motor power W 120* 120* Absorption 0,92* 0,92* А Number of laps RPM 26* 26* Weight Kg 36 38 Inlet connection (D) Ømm 50 50 Hose supplied Ømm 35 40 Maximum hose length m 18 20 Width mm 660 660 Height 480 mm 480 Depth 425 mm 425

Reel accessories

Curved connector

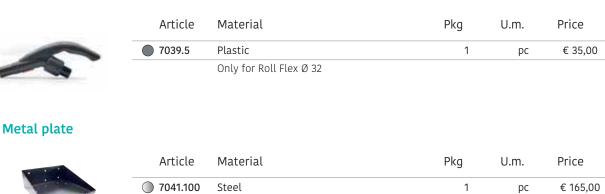

To fix the Roll Flex to the wall

Industrial complements

Field of application:

industrial



hy

For professional and industrial installations




Complements for industrial vacuum system are system components that allow customisation and correct operation of professional central vacuum cleaners and/or modular systems. The choice of suitable accessories allows, by combining standard products, to arrive at sophisticated systems capable of integrating with the most varied production processes and allowing the suction unit to operate for many hours, even in continuous operation.





Learn more

Air vent silencers



Check valves for motor matching



Article	Description	Pkg	U.m.	Price
0110001	Check valves 2" motor matching	1	рс	€ 150,00
0110002	Check valves 4" motor matching	1	рс	€ 380,00
0110003	Check valves 3" motor matching	1	рс	€ 270,00

Automation and control elements

1	Article	Description	Pkg	U.m.	Price
ETT I) 3301.0	Electric panel starting system 3 motors*	1	рс	€ 1.590,00
-	3301.6	Electric panel starting system 2 motors*	1	рс	€ 1.530,00
		*for electric motors only			
•]	3301.20	Automatic control panel industrial touch system	1	рс	€ 3.080,00
BITTE	3301.4	Resistive divider with 4 entries*	1	рс	€ 32,00
		*for electric motors only			

Vacuum breaker valves

Art	icle	Description	Pkg	U.m.	Price
205	0.5	Vacuum breaker valves Ø 80	1	рс	€ 100,00
205	0.7	Vacuum breaker valves Ø 100	1	рс	€ 120,00

Steel exhaust Kit

C	Article	Description	Pkg	U.m.	Price
	0 7020.63	Steel exhaust Kit Ø 60	1	рс	€ 210,00
	0 7020.80	Steel exhaust Kit Ø 80	1	рс	€ 320,00
	0 7020.10	Steel exhaust Kit Ø 100	1	рс	€ 435,00

Pneumatic sleeve valves

Article	Description	Pkg	U.m.	Price
1456.5MA	Pneumatic sleeve valves Ø 50 230 V ac	1	рс	€ 810,00
1456.4MA	Pneumatic sleeve valves Ø 60 230 V ac	1	рс	€ 1.040,00
1456.6MA	Pneumatic sleeve valves Ø 80 230 V ac	1	рс	€ 1.520,00

Inlet valves

Inlet Valves

Field of application: domestic professional industrial



Pipe network Ø 50 mm



Inlet valves **connect the pipe network of the central vacuum system** and the hose used for cleaning.

They are an **essential element** to guarantee the tightness of the system and **maintain the vacuum within the pipe network.**

All inlet valves are **compatible with standard hoses and Flisy and Flisy 2 wireless hoses.**

Flisy 2 wireless on/off cleaning hoses

The system starts when the hose is inserted into the vacuum valve.



ি

The button on the handle can then be used to **switch the vacuum on and off** as required.

Standard cleaning hoses

The suction system is switched on when the hose is inserted into the inlet valve.

To switch off the system, simply pull out the hose, interrupting suction.



Main features

Available in rectangular (Virtus or Generation), square (Standard or Design) or professional versions, Sistem Air's valves represent the best line on the market.

Different uses, different aspects

- **Domestic:** design, watertightness and stability of the aesthetic plate are basic requirements for valves for domestic applications.
- · Professional: robustness, adaptability to the environment and watertightness are required in industrial applications.

What makes Virtus valves unique

Innovations designed by Sistem Air take the experience of using a central vacuum system to a higher level, guaranteed over time.

- 1- Double o-ring seat for a perfect seal
- 2- Frame structure identical to that of the chosen civil series
- 3- Beautiful and practical, the caps blend in with the aesthetics of the room
- 4- Mechanical resistance thanks to rounded walls and ribs
- 5- Reinforced supporting structure that increases torsional rigidity
- 6- SEBS gasket, prevents memory effect and remains unaltered over time
- 7- Ultra-fast connection using wiring terminals
- 8- Works with all hoses on the market

Available for the main civil series on the market

The Sistem Air inlet valves mirror the respective domestic series in every detail, not only in the shape of the switches but also in the colours and finish. A perfect resemblance that makes it possible to combine electrical switches and inlet valves.

Sistem Air inlet valves are fitted with the original finish plates of the following brands:




Design for all tastes

The interchangeable covers are available in a palette of 12 colours, in Dark, Natural and Fruit variants, for maximum aesthetic expression of the room.

Durable and safe in professional applications

Even in the industrial field, Sistem Air valves represent excellence, thanks to their robustness and the availability of antistatic or ATEX-certified versions, which allow them to be used even in explosion-hazardous environments.













Rectangular inlet valves

VIRTUS

BTicino inlet valves

BTicino Living Light inlet valve

Article	Description	Pkg	U.m.	Price
1561.0	Black	10	pcs	€ 48,00
) 1562.0	White	10	pcs	€ 48,00
1565.0	Tech	10	pcs	€ 52,00
	1561.01562.0	● 1561.0 Black ○ 1562.0 White	● 1561.0 Black 10 ○ 1562.0 White 10	1561.0 Black 10 pcs 1562.0 White 10 pcs

BTicino Air inlet valve

	Article	Description	Pkg	U.m.	Price
-	• 1570.0	Anthracite	10	pcs	€ 48,00
) 1571.0	White	10	pcs	€ 48,00
	1572.0	Tech	10	pcs	€ 52,00

BTicino Axolute Air inlet valve

	Article	Description	Pkg	U.m.	Price
-	• 1573.1	Black	10	pcs	€ 52,00
) 1573.2	White	10	pcs	€ 52,00
	1573.3	Tech	10	pcs	€ 52,00

BTicino Luna inlet valve

Article	Description	Pkg	U.m.	Price
) 1568.0	White*	10	pcs	€ 48,00
	*series Generation			

BTicino Now inlet valve

	Article	Description	Pkg	U.m.	Price
z	1573.5	Black	10	pcs	€ 48,00
2 2) 1573.4	White	10	pcs	€ 48,00
	1573.6	Sand	10	pcs	€ 48,00

BTicino Axolute inlet valve

	Article	Description	Pkg	U.m.	Price
]•	1566.0	Black	10	pcs	€ 52,00
) 1564.0	White	10	pcs	€ 52,00
	1567.0	Tech	10	pcs	€ 52,00

BTicino Màtix inlet valve

	Article	Description	Pkg	U.m.	Price
5) 1569.0	White	10	pcs	€ 48,00

Vimar inlet valves

Vimar Eikon Evo inlet valve

	Article	Description	Pkg	U.m.	Price
	• 1558.0	Black	10	pcs	€ 48,00
3 B) 1558.1	White	10	pcs	€ 48,00
Statement of the local division of the local	1553.5	Next	10	pcs	€ 52,00

Vimar Idea inlet valve

Article Description	Pkg	U.m.	Price
1553.0 Black	10	pcs	€ 48,00
O 1553.2 White	10	pcs	€ 48,00

Vimar Arkè Fit inlet valve

	Article	Description	Pkg	U.m.	Price
	1553.12	Anthracite	10	pcs	€ 48,00
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1) 1553.13	White	10	pcs	€ 48,00
4 4 4	1553.14	Metal	10	pcs	€ 52,00

Vimar Arkè inlet valve

	Article	Description	Pkg	U.m.	Price
1	1553.9	Anthracite	10	pcs	€ 48,00
) 1553.10	White	10	pcs	€ 48,00
y.	1553.11	Metal	10	pcs	€ 52,00

Vimar Plana inlet valve

 Article	Description	Pkg	U.m.	Price
) 1553.4	White	10	pcs	€ 48,00
0 1553.3	Silver	10	pcs	€ 52,00

Vimar Linea inlet valve

	Article	Description	Pkg	U.m.	Price
) 1553.15	White	10	pcs	€ 4800
	0 1553.16	Hemp	10	pcs	€ 48,00
	1553.17	Black	10	pcs	€ 48,00

Simon Urmet inlet valves

Simon Urmet Nea inlet valve

Article	Description	Pkg	U.m.	Price
1543.0	Anthracite	10	pcs	€ 48,00
) 1543.1	White	10	pcs	€ 48,00
1543.2	Dark steel	10	pcs	€ 52,00
1543.3	Ice white	10	pcs	€ 52,00
1543.4	Steel	10	pcs	€ 52,00

Rectangular inlet valves



1

1

рс

рс

€ 140,00

€ 150,00

Ave inlet valves

Ave Allumia S44 Inlet valve

Ave Alluma 344 milet	valve				
-	Article	Description	Pkg	U.m.	Price
28	1563.7	Titanium	1	рс	€ 66,00
Ave Blanc Inlet valve					
	Article	Description	Pkg	U.m.	Price
) 1563.0	White	1	рс	€ 48,00
Ave Life 44 Inlet valve					
	Article	Description	Pkg	U.m.	Price
	1563.5	Black	1	рс	€ 66,00
Real and					
Ave Tekla Inlet valve					
full section of the	Article	Description	Pkg	U.m.	Price
	1563.9	Matt black	1	рс	€ 66,00
Reasonable 1					
Ave Banquise Inlet va	lve				
-	Article	Description	Pkg	U.m.	Price
) 1563.2	White	1	рс	€ 48,00
Ave Domus 100 Inlet v	alve				
	Article	Description	Pkg	U.m.	Price
11) 1563.6	White	1	рс	€ 66,00
Ave Noir Inlet valve					5.
	Article	Description	Pkg	U.m.	Price
Constant of	• 1552.0	Black	1	рс	€ 48,00
Ave Touch Inlet valve					
	Article	Description	Pkg	U.m.	Price
A REAL PROPERTY AND	1563.3	Black	1	рс	€ 130,00
	○ 45 (0 ÷	And to			6 4 4 9 6 5

0 1563.4

1563.8

White

Allumia

Gewiss inlet valves

Gewiss Chorus Inlet valve

Article	Description	Pkg	U.m.	Price
1557.2	Black	20	pcs	€ 48,00
) 1557.1	White	20	pcs	€ 48,00
0 1557.3	Titanium	20	pcs	€ 48,00
	1557.21557.1	● 1557.2 Black ○ 1557.1 White	1557.2 Black 20 1557.1 White 20	1557.2 Black 20 pcs 1557.1 White 20 pcs

Gewiss Playbus Inlet valve

Article	Description	Pkg	U.m.	Price
1557.0	Black	20	pcs	€ 48,00

Abb inlet valves

Abb Chiara Inlet valve



Article	Description	Pkg	U.m.	Price
) 1542.0	White	1	рс	€ 48,00

Abb Mylos Inlet valve

Article	Description	Pkg	U.m.	Price
• 1542.1	Black	1	рс	€ 66,00
) 1542.2	White	1	рс	€ 66,00

Abb Élos Inlet valve

Article	Description	Pkg	U.m.	Price
1541.0	Black	1	рс	€ 48,00

Legrand inlet valves

Legrand Vela Inlet valve

12	Article	Description	Pkg	U.m.	Price
2	1551.4	Black	1	рс	€ 48,00
) 1551.3	White	1	рс	€ 48,00

Square inlet valves



Square Inlet valves

Article	Description	Pkg	U.m.	Price
○ 1464.0B	White	1	рс	€ 40,00
🔵 1464.1B	Ivory	1	рс	€ 40,00
1464.2B	Silver	1	рс	€ 49,00

DESIGN

Square inlet valves

Design Inlet valves

	Article	Description	Pkg	U.m.	Price
) 1467.0	White	1	рс	€ 42,50
	Article	Description	Pkg	U.m.	Price
0	Article	Complete inlet body	1	рс	€ 38,00

Interchangeable covers by Design

Natural tones Cover set

F	Article	Description	Pkg	U.m.	Price
~	1467.C2	Creme	1	рс	€ 7,00
1					
-	1467.C8	Light gray	1	рс	€ 7,00
F					
-	1467.C6	Sand	1	рс	€ 7,00
F					
~	1467.C9	Vanille	1	рс	€ 7,00

Dark tones Cover set

Article	Description	Pkg	U.m.	Price
1467.C1	Dark gray	1	рс	€ 7,00
1 467.C5	Black	1	рс	€7,00
1467.C4	Silver	1	рс	€ 13,00
1467.C10	Coffee	1	рс	€ 7,00

Fruit tones Cover set

1000 million	Article	Description	Pkg	U.m.	Price
	1467.C3	Lemon	1	рс	€ 7,00
5	1467.C11	Berry	1	рс	€ 7,00
5	1467.C7	Olive	1	рс	€ 7,00

Special inlet valves

.....

Vacpan inlet valve



Article	Description	Pkg	U.m.	Price
0 1464.2	White	1	рс	€ 103,00
1464.3	Black	1	рс	€ 103,00
1464.5	Silver	1	рс	€ 112,00

Infloor inlet valve



Article	Description	Pkg	U.m.	Price
1455.0A	Gray Ø 32	1	рс	€ 125,00
1455.0N	Black Ø 32	1	рс	€ 125,00
1455.2A	Gray Ø 40	1	рс	€ 133,00
1455.2N	Black Ø 40	1	рс	€ 133,00

Steel key for infloor inlet valve

Article	Description	Pkg	U.m.	Price
1400.1	Steel	1	рс	€ 5,60

External inlet valve

- mil



Article	Description	Pkg	U.m.	Price
) 1459.5	White	1	рс	€ 72,00

Industrial inlet valves with microswitch

Industrial inlet valves with microswitch

Article	Description	Pkg	U.m.	Price
1556.0	Black Ø 32/40	1	рс	€ 95,00



Article	Description	Pkg	U.m.	Price
1556.0A	Industrial antistatic valve c/micro Ø 32/40	1	рс	€ 128,00
😥 1556.0AX	Industrial antistatic valve c/micro Atex Ø 32/40*	1	рс	€ 307,00

*Atex zone 22 certified microswitch valve

Motorised hose reel



Article	Description	Pkg	U.m.	Price
7041.51E	Roll Flex Ø 32 mm	1	рс	€ 1.910,00
7041.61E	Roll Flex Ø 40 mm	1	рс	€ 2.150,00

PVC Installation material

Field of application: domestic professional industrial

Pipe network: 2" Ø 50 mm Ø 63 mm Ø 80 mm Ø 100 mm

The Sistem Air installation material is designed to ensure a perfect fit between the pipework and fittings.

In particular, the pipes are **antistatic**, **self-extinguishing and calibrated** in thicknesses between 2.2 mm and 3 mm.

The jointing is carried out by gluing with a special **cold self-welding** glue that guarantees a perfect seal of the glued components.

The absence of sharp 90° turns facilitates the passage of air and any aspirated bodies, so that the risk of obstruction is eliminated and the suction power remains intact.

FEATURES

- Antistatic pipes
- Self-extinguishable
- Calibrate
- With thicknesses between 2.2 mm and 3 mm



Installation Guide

Main features

Calibrated fittings, maximum efficiency

Sistem Air's installation material is designed to maintain the same internal diameter at all times to avoid inefficiencies and pressure drops when air and suction dust pass through.

The high thickness ensures its resistance to the stresses that may be encountered on site. Striking notches and arrows indicating air direction further simplify installation.

Backplates without surprises

Our backplates are suitable for installation on both masonry and plasterboard walls. They have a connector that can rotate through 270°, and have numerous pre-marked holes so that the electrical connections of the microswitch line can be made with ease.

Furthermore, on the mortar door, in the rectangular version, there is a marker that allows, with the help of a common metal detector, to precisely trace them under the plaster in case they have been covered by mistake.

To each his own diameter

All PVC installation material is available in diameters 50/63/80/100 mm, with the appropriate adapters to switch from one size to another, so that in multi-user plants, each pipe section can be made with the appropriate diameter to allow for a flow of air capable of satisfying the intended simultaneous use requirement.

Special situations

There are situations in which it is necessary to adopt dedicated installation solutions in order to ensure that the piping network is properly constructed and sealed throughout its development.

Criteria for the selection of pipework

PVC pipe and fittings are suitable for all types of central vacuum system installations. Where there are particular problems with mechanical resistance or in the case of exposed pipe installations, antistatic steel pipes can be used.

Notes

When it is necessary to cross an external section with rigid pipework, appropriate insulation and the use of expansion joints should be provided. Different materials compromise the guarantee of the system and can create blockages in the pipe network.

Warnings

The installation material is specially made for centralised vacuum cleaning. Using the dedicated plant material allows you to realise installations with the highest performance guarantee.











Installation kits for standard system

They include the material for setting up a central vacuum system. The kits can be added together in order to obtain the desired inlet points.

By using the kits, in buildings with a regular layout, you are sure to have all the material to complete the pipework.

Installation kits with rectangular backplates

FOR THE INSTALLATION OF INLET VALVES SERIES



Virtus Generation



	Article	Description	Pkg	U.m.	Price
\bigcirc	7030.3	Installation kit for 3 rectangular backplates	1	рс	€ 307,00
	7030.4	Installation kit for 4 rectangular backplates	1	рс	€ 420,00
	7030.5	Installation kit for 5 rectangular backplates	1	рс	€ 530,00

Art.	Inlets point	Backplates curved fitting	PVC pipe	Elbow MF	Elbow FF	Wye FF	Sleeve	Venting grid	Pre-wired cable	Glue 250 gr
7030.3	3	3 pcs	20 m	9 pcs	12 pcs	3 pcs	9 pcs	1 pcs	25 m	1 pcs
7030.4	4	4 pcs	28 m	12 pcs	16 pcs	4 pcs	12 pcs	1 pcs	37,5 m	1 pcs
7030.5	5	5 pcs	36 m	15 pcs	20 pcs	5 pcs	15 pcs	1 pcs	50 m	1 pcs

Installation kits with square backplates

FOR THE INSTALLATION OF INLET VALVES SERIES



Design Square Standard




Article	Description	Pkg	U.m.	Price
7030.3 E	Installation kit for 3 square backplates	1	рс	€ 307,00
7030.4E	Installation kit for 4 square backplates	1	рс	€ 420,00
7030.5E	Installation kit for 5 square backplates	1	рс	€ 530,00

Art.	Inlets point	Backplates curved fitting	PVC pipe	Elbow MF	Elbow FF	Wye FF	Sleeve	Venting grid	Pre-wired cable	Glue 250 gr
7030.3E	3	3 pcs	20 m	9 pcs	12 pcs	3 pcs	9 pcs	1 pcs	25 m	1 pcs
7030.4E	4	4 pcs	28 m	12 pcs	16 pcs	4 pcs	12 pcs	1 pcs	37,5 m	1 pcs
7030.5E	5	5 pcs	36 m	15 pcs	20 pcs	5 pcs	15 pcs	1 pcs	50 m	1 pcs

Standard system installation material

Universal rectangular backplates



Universal square backplates

হ	Article	Description	Pkg	U.m.	Price
	1450.4B	Square with curved fitting	10	pcs	€ 14,90
ৃ	1 450.5B	Square with straight fitting	10	pcs	€ 14,90
<u>)</u>					,

Floor level backplates

	Article	Description	Pkg	U.m.	Price
-	1450.2	Floor-level, curved aluminium fitting	10	pcs	€ 80,00
Ξ.	1450.3	Floor-level, straight aluminium fitting	10	pcs	€ 85,00
	1450.23	Floating floor adapter	10	pcs	€ 32,00

Backplate for vacpan inlet

And Adventure of the other	Article	Description	Pkg	U.m.	Price
	1450.16	backplate for vacpan inlet	1	рс	€ 145,00

Backplate extension kit

Article	Description	Pkg	U.m.	Price
1450.8	Rectangular backplate extension kit	10	pcs	€ 11,10
1450.9	Square backplate extension kit	10	pcs	€ 11,10
1457.1	Extension for domestic line inlet valves	10	pcs	€ 5,60
1457.2	Extension for floor inlet valves	10	pcs	€ 48,00

Standard system installation material

Description

PVC Pipes





Elbows

Article



Elbow MF



3050.0	PVC elbow 45° MF Ø 50 mm	60	pcs	€ 2,70
3050.1	PVC elbow 45° FF Ø 50 mm	60	pcs	€ 2,70
3063.0	PVC elbow 45° MF Ø 63 mm	30	pcs	€ 7,50
3063.1	PVC elbow 45° FF Ø 63 mm	30	pcs	€ 7,50
3080.0	PVC elbow 45° MF Ø 80 mm	1	рс	€ 10,50
3080.1	PVC elbow 45° FF Ø 80 mm	1	рс	€ 14,00
3010.0	PVC elbow 45° MF Ø 100 mm	1	рс	€ 17,00
3010.1	PVC elbow 45° FF Ø 100 mm	1	рс	€ 19,00

Price

U.m.

Pkg

Pkg

U.m.

Price

Sleeve

Article	Description	Pkg	U.m.	Price
1150.1	PVC sleeve with shutter Ø 50 mm	100	pcs	€ 1,60
1163.1	PVC sleeve with shutter Ø 63 mm	40	pcs	€ 4,60
1180.1	PVC sleeve with shutter Ø 80 mm	1	рс	€ 6,00
1110.1	PVC sleeve with shutter Ø 100 mm	1	рс	€ 8,00

Wye



4050.0 PVC wye 45° MF Ø 50 mm 20 € 4,90 pcs 4050.1 PVC wye 45° FF Ø 50 mm 20 € 4,90 pcs 4063.0 PVC wye 45° MF Ø 63 mm 15 € 16,00 pcs 4063.1 PVC wye 45° FF Ø 63 mm 15 € 16,00 pcs 4080.0 PVC wye 45° MF Ø 80 mm 1 € 18,00 рс 4080.1 PVC wye 45° FF Ø 80 mm 1 € 20,00 рс 4010.0 PVC wye 45° MF Ø 100 m 1 € 23,50 рс 4010.1 PVC wye 45° FF Ø 100 mm 1 рс € 27,00

Wye MF



Wye FF

Article

Description

Prewired cable

	Article	Description	Pkg	U.m.	Price
	9016.7	Prewired cable mt 25	1	рс	€ 60,00
	9016.0	Prewired cable mt 50	1	рс	€ 110,00
	9016.1	Prewired cable mt 100	1	рс	€ 208,00

Screw plug

	Article	Description	Pkg	U.m.	Price
	5050.1	PVC screw plug Ø 50 mm	1	рс	€ 6,40
	6063.1	PVC screw plug Ø 63 mm	1	рс	€ 17,00
	8080.1	PVC screw plug Ø 80 mm	1	рс	€ 20,00
	1010.1	PVC screw plug Ø 100 mm	1	рс	€ 21,50

Eccentric extension

0	Article	Description	Pkg	U.m.	Price
	6063.3	PVC eccentric extension Ø 50/63 mm	1	рс	€ 8,00
	8080.3	PVC eccentric extension Ø 63/80 mm	1	рс	€ 11,00
	1010.3	PVC eccentric extension Ø 80/100 mm	1	рс	€ 12,00

Special glue

Article	Description	Pkg	U.m.	Price
9225.1	Special glue with brush 250 gr	1	рс	€ 23,50
9225.2	Special glue with brush 500 gr	1	рс	€ 40,00

Silencer

1		81	
1			
		8	
.1			

Article	Description	Pkg	U.m.	Price
110001	PVC silencer Ø 50 mm	1	рс	€ 50,00
110002	PVC silencer Ø 63 mm	1	рс	€ 122,00

○ 5050.4	PVC vent grid Ø 50 mm	1	рс	€ 18,00
○ 5063.4	PVC vent grid Ø 63 mm	1	рс	€ 21,00

Expansion joint

Article	Description	Pkg	U.m.
5050.0	PVC expansion joint Ø 50 mm	1	рс
5050.2	PVC expansion joint Ø 63 mm	1	рс

Price

€ 23,50 € 35,00

Installation material

Equipment



o

Article	Description	Pkg	U.m.	Price
4163.0	Pipe cutting tool for pipes up to Ø 63 mm	1	рс	€ 142,00
4100.0	Pipe cutting tool for pipes up to Ø 100 mm	1	рс	€ 340,00
4163.1	Spare wheel for pipe-cutting tool	1	рс	€ 18,00

Fire stop coupling

	Article	Description	Pkg	U.m.	Price
D	1150.3	Fire stop coupling Ø 50 mm	1	рс	€ 220,00
	1163.2	Fire stop coupling Ø 63 mm	1	рс	€ 240,00
	1180.2	Fire stop coupling Ø 80 mm	1	рс	€ 267,00
	1110.2	Fire stop coupling Ø 100 mm	1	рс	€ 286,00

Ball valve for manual section



Article	Description	Pkg	U.m.	Price
2050.0	PVC ball valve for manual section Ø 50 mm	1	рс	€ 122,00
2050.1	PVC ball valve for manual section Ø 63 mm	1	рс	€ 190,00
2050.2	PVC ball valve for manual section Ø 80 mm	1	рс	€ 340,00
2050.3	PVC ball valve for manual section Ø 100 mm	1	рс	€ 420,00
• 2050.0CM	Valves with micro Ø 50 mm	1	рс	€ 194,00

Testing for standard and Sense installations

System test

Article	Description	Pkg	U.m.	Price
5050.5	Test plug for domestic series installations	1	рс	€ 5,30
• 4001.0	Vuotometer	1	рс	€ 127,00
4300.1	System Test	1	рс	a richiesta

Connection to the Air Cloud network



cleaner to Air Cloud services. It is necessary to have an active internet connection for Air Cloud to function properly and to obtain the 6-year Cloud Warranty.

Wi Fi module

	Article	Description	Pkg	U.m.	Price
\bigcirc	4202.2	Wi-Fi for Tecno Prime central vacuum cleaner	1	рс	€ 106,00

Remote control of professional installations



Remote Control Master Control, the innovative communication system designed by Sistem Air for remote monitoring of industrial and professional central vacuum cleaners. For correct operation, the Master Control software and LAN card must work together.

Master Control sistem

The Master Control software enables real-time control of all central vacuum cleaners connected to the local network in the building. The perfect mechanism to make the system connected.

-		Article	Description	Pkg	U.m.	Price
		4202.0	Software Master Control Sistem air	1	рс	€ 265,00
=5	-					

LAN card

The Master Control connection card is the interface that allows the information shown on the display to be transmitted over a local network, to which both the central vacuum cleaner and the PC from which remote control is to be carried out are connected.



	Article	Description	Pkg	U.m.	Price
\bigcirc	4202.1	LAN card Master Control Sistem Air	1	рс	€ 550,00



Steel Installation material

Field of application:



industrial

Pipe network: Ø 50 mm Ø 60 mm Ø 80 mm Ø 100 mm

Steel installation material responds to precise requirements that emerge particularly in industrial applications, where suction of:

- particularly fine materials, different from common domestic dust, and capable of generating considerable static charges along the pipeline
- 2. materials that, due to their weight, consistency and temperature, could damage PVC pipework
- 3. dust and explosive gases

Sometimes the choice falls on this type of system for aesthetic reasons or for the resistance required depending on the installation context: what all these situations have in common is the robustness, electrical conductivity and perfect watertightness of the systems created.

FEATURES

- Sturdiness
- Electrical conductivity
- Watertightness
- Antistatic material



Discover Sistem Air Pro

Main features

Sturdiness

The pipes and fittings are made of zinc coated steel, with thicknesses to ensure solidity of the assembled pipework without excessive weight in the case of anchoring to overhead structures.

Continuity and tightness

Thanks to the special junction sleeves, the realisation of the pipes network is particularly simple: the connection between the different elements is realised by tightening the steel fittings, inside of which is a rubber sleeve that guarantees watertightness. A metal flap brings the two steel elements to be connected into contact, thus guaranteeing electrical continuity and simplifying the earthing of the entire network.

To each his own diameter

The steel installation material is also available in diameters 50/60/80/100 mm, with the appropriate adapters to switch from one size to the other, so that in multi-user system each pipe section can be made with the appropriate diameter to allow for a flow of air capable of meeting the planned simultaneous use requirement.

Criteria for the selection of tubing

The use of metal fittings is necessary in the following cases:

- 1. suction of easily inflammable or explosive materials, which could explode inside the pipe due to sparks generated by the accumulation of static charges formed by the passage of air through PVC pipes. In order to disperse these charges, an earthing connection must be made to the pipe, which becomes entirely conductive thanks to the special junction sleeves that enable electrical conductivity;
- 2. suction of incandescent materials, which could puncture the plastic pipes once they have been sucked in;
- 3. suction of abrasive materials, which could erode the plastic pipework, especially in bends;
- 4. exposed pipework, where there is a need to prevent environmental dust attracted by the static charges present from being deposited on the external walls of the pipework.







Industrial system installation

Zinc coated steel tubes

Article	Description	Pkg	U.m.	Price
0 1850.0F	PVC pipe Ø 50 mm (2 m bars)	1	m	€ 23,50
1863.0F	PVC pipe Ø 60 mm (2 m bars)	1	m	€ 32,00
 1880.0F	PVC pipe Ø 80 mm (2 m bars)	1	m	€ 48,00
1810.0F	PVC pipe Ø 100 mm (2 m bars)	1	m	€ 56,00

Zinc coated 45° elbows

Article	Description	Pkg	U.m.	Price
3050.1F	Zinc coated steel elbow 45° Ø 50 mm	1	рс	€ 20,00
3063.1F	Zinc coated steel elbow 45° Ø 60 mm	1	рс	€ 32,00
3080.1F	Zinc coated steel elbow 45° Ø 80 mm	1	рс	€ 55,00
3010.1F	Zinc coated steel elbow 45° Ø 100 mm	1	рс	€ 50,00

Zinc coated 90° elbows

Article	Description	Pkg	U.m.	Price
3050.0F	Zinc coated steel elbow 90° Ø 50 mm	1	рс	€ 21,00
3063.0F	Zinc coated steel elbow 90° Ø 60 mm	1	рс	€ 35,00
3080.0F	Zinc coated steel elbow 90° Ø 80 mm	1	рс	€ 55,00
3010.0F	Zinc coated steel elbow 90° Ø 100 mm	1	рс	€ 70,00

Zinc coated steel sleeve

A	rticle	Description	Pkg	U.m.	Price
0 11	50.1F	Zinc coated steel sleeve Ø 50 mm	5	pcs	€ 21,00
11	63.1F	Zinc coated steel sleeve Ø 60 mm	5	pcs	€ 25,50
11	80.1F	Zinc coated steel sleeve Ø 80 mm	1	рс	€ 47,00
11	10.1F	Zinc coated steel sleeve Ø 100 mm	1	рс	€ 52,00

Zinc coated steel wye 45°

Article	Description	Pkg	U.m.	Price
4050.0F	Zinc coated steel wye 45° Ø 50 mm	1	рс	€ 38,00
4063.0F	Zinc coated steel wye 45° Ø 60 mm	1	рс	€ 50,00
4080.0F	Zinc coated steel wye 45° Ø 80 mm	1	рс	€ 56,00
4010.0F	Zinc coated steel wye 45° Ø 100 mm	1	рс	€ 69,00

Zinc coated steel extension

	Article	Description	Pkg	U.m.	Price
	🔵 6050.0F	Zinc coated steel extension Ø 50/60 mm	1	рс	€ 33,00
	8060.0F	Zinc coated steel extension Ø 60/80 mm	1	рс	€ 34,50
	1080.0F	Zinc coated steel extension Ø 80/100 mm	1	рс	€ 31,00

Pipe clamp

	Article	Description	Pkg	U.m.	Price
	1401.50	Pipe clamp Ø 50 mm	10	pcs	€ 4,80
	1401.60	Pipe clamp Ø 60 mm	10	pcs	€ 5,30
	1401.80	Pipe clamp Ø 80 mm	5	pcs	€ 8,00
	1401.100	Pipe clamp Ø 100 mm	5	pcs	€ 10,50

Antistatic industrial inlet with microswitch

	Article	Description	Pkg	U.m.	Price
	1556.0A	Antistatic industrial inlet with microswitch Ø 32/40	1	рс	€ 128,00
6	🕵 1556.0AX	Antistatic industrial inlet with microswitch Atex Ø 32/40*	1	рс	€ 307,00
		*Inlet with Atex zone 22 certified microswitch			

Antistatic hose



Antistatic inlet connector

	Article	Description	Pkg	U.m.	Price
I	7038.0A	Antistatic inlet connector Ø 32	1	рс	€ 65,00
	7038.1A	Antistatic inlet connector Ø 40	1	рс	€ 45,00

Antistatic chromium plated handgrip

-	Article	Description	Pkg	U.m.	Price
	🔵 7039.0A	Antistatic chromium plated handgrip Ø 32	1	рс	€ 85,00

Sense Retractable hose system

Field of application:

domestic

suitable for all central vacuum systems



Wireless (optional)

Sense by Sistem Air is the in-wall hose system that makes **cleaning practical and light**, amplifying the central vacuuming experience to the fullest.

The user can choose to rely on a system that eliminates the clutter of the hose, optimising the installed suction points, and enhancing the design of the room thanks to the high-tech finishes of the covers in **perfect Sistem Air style.**

FEATURES

- Reduced footprint
- Perfect positioning
- Dedicated space for wiring
- Wireless power on/off
- Versatility of installation
- System sealing





Main features

The vacuum fits in a drawer

The Sense retractable hose system eliminates hose clutter. This way, the vacuum and all accessories are always ready for use and conveniently stored in small spaces.

Lightweight

Sense is a system designed to experience the convenience of central vacuuming.

Cleanings are ultra-light and you no longer need to move the hose around the house. It will follow you around.

Wireless (optional)

When there is a need to switch the system on or off, Flisy 2 allows you to do so with a simple button on the handle.

There is no need to run from room to room to stop the suction.

Back into the wall

The cleaning hose does not coil up and disappear, it simply goes back into the pipework installed in the wall thanks to the suction force.

The Sense hose always remains ready for cleaning and retracts when it is no longer needed.


Express your personality

The design, born from the combination of a layer of pure steel and a high-strength plastic mixture, makes the Sense covers a robust furniture accessory, made to be experienced every day.

The cover finishes enhance the ambience in a discreet way, with the tones of brushed steel or demi-matt white. Alternatively, you can liven up the room by choosing to paint it in a colour of your choice thanks to the special .paintable finish.



Brushed steel cover



Demi-matt white cover



Paintable finish cover















Sense retractable hose system installation material

Installation kit for 1 inlet point Multi Sense

Article	Description	Pkg	U.m.	Price
○ 7230.0	White	1	PCS	€ 349,00

Backplates	Cover	Elbow FF 22,5° - Ø 2"	Elbow FF 45° large - Ø 2"	Elbow FF 90° large - Ø 2"	Glue 60 g	Sleeve PVC Ø 2"	Sleeve Ø 2" → 50 mm	PVC pipe Ø 2"
1 pc Multi Sense	1 pc White	2 pcs	2 pcs	3 pcs	1 pc	7 pcs	1 pc	16 m

Backplate and Cover

Article	le Description		U.m.	Price
0 1450.32	Multi Sense backplates	1	рс	€ 80,00
0 1450.33	Mono Sense backplates	1	рс	€ 70,00
1470.0	Steel Sense Cover	1	рс	€ 65,00
) 1470.1	White Sense Cover	1	рс	€ 65,00
1470.2	Paintable Sense Cover	1	рс	€ 65,00

Bulk installation material for Sense system by Sistem Air

	Article	Description	Pkg	U.m.	Price
) 1851.0	PVC pipe Ø 2" thick 1,4 mm (bars m 2)	20	m	€ 5,90
) 3051.6	PVC elbow 22,5° Ø 2" FF	1	рс	€ 6,40
-1) 3051.7	PVC elbow 45° Ø 2" FF large	1	рс	€ 13,50
	O 3051.8	PVC elbow 90° Ø 2" FF large	1	рс	€ 19,00
6					
0	0 1151.1	PVC sleeve Ø 2"	20	pcs	€ 1,35
0	0 5051.1	PVC closing cap Ø 2"	8	pcs	€ 2,60
	1150.4	PVC sleeve with shutter Ø 2" \rightarrow 50 mm	1	рс	€ 4,80
P	0 4051.2	PVC wye 45°	1	рс	€ 4,90
a ma	0 1401.0	PVC pipe clamp Ø 2"	20	рс	€ 1,80

Sense system accessories

Flexible hose

/	Article	Description	Pkg	U.m.	Price
	7237.9	Length 9 m	1	рс	€ 143,00
	7237.12	Length 12 m	1	рс	€ 190,00
	7237.15	Length 15 m	1	рс	€ 227,00

Flexible hose with hose cover



Article	Description	Pkg	U.m.	Price
7237.9 P	Length 9 m	1	рс	€ 297,00
7237.12P	Length 12 m	1	рс	€ 366,00
7237.15P	P Length 15 m	1	рс	€ 504,00

Sense flexible hose fitting

	Article	Description	Pkg	U.m.	Price
*	7038.05	Plastic	1	рс	€ 13,00
		Flexible hose - Sense handle fitting			
Sense curved fitting					
	Article	Description	Pkg	U.m.	Price
5	0 7039.5	Plastic	1	рс	€ 35,00
		For Sense retractable hose			
System tech Flisy 2 🙃	•				
-	Article	Description	Pkg	U.m.	Price
	○ 7039.4W	Wireless	1	рс	€ 233,00
		On/off system with remote control receiver			
System Tech Flisy 2 rece	eiver* 🎅				
	Article	Description	Pkg	U.m.	Price
	3301.12	Wireless receiver	1	рс	€ 140,00
		*If several receivers are to be installed, just one handle is enough			
Sense cleaning kit Sense	e				
	Article	Description	Pkg	U.m.	Price
T	7232.9	Length 9 m	1	рс	€ 357,00
	7232.12	Length 12 m	1	рс	€ 408,00
	7232.15	Length 15 m			€ 454,00

Sense cleaning kit with hose cover



Article	Description	Pkg	U.m.	Price
7232.9P	Length 9 m	1	рс	€ 500,00
7232.12P	Length 12 m	1	рс	€ 557,00
7232.15P	Length 15 m	1	рс	€ 690,00

Cleaning accessories

Cleaning Accessories

Field of application: domestic



Accessory connection Ø 32 mm



Sistem Air cleaning accessories respect all surfaces, even the most delicate ones, **guaranteeing a superior degree of hygiene** and a long lifetime.

In particular, the design of the brushes is functional to their ease of use. **Specific shapes with bumper profiles and joints** make it easier to reach the most hidden places.

The **soft, natural bristles** take care of the room, eliminating all dust residue in depth.

A perfect mix, combined with hoses and accessories for every need. **The best, for the best result.**

FEATURES

- Pure White colour, leaves no traces: protects furniture and materials
- Natural bristles, gentle on surfaces, durable
- No more stress, professional joints accommodate movements

Main features

The convenience of switching on directly from the handle or the essentiality of the traditional system. Two solutions for managing your central vacuum system.

On/off wireless Flisy 2



It is immediately recognisable by its pure white colour and the crystal button in the centre of the handle.

Flisy 2 is the wireless on/off system invented by Sistem Air to switch the system on and off at the touch of a button. As often as you like.

Rechargeable batteries

Flisy 2's rechargeable lithium-ion batteries have an almost infinite lifetime. After many cleaning sessions, it will only need a quick recharge by plugging into a simple USB valve with the supplied cable.

It is recommended not to leave the hose plugged into the valve when not in use to avoid draining the batteries.

Standard

The **dolphin grey** handle characterises the traditional system for switching the system on and off.

By inserting the hose into the inlet, suction starts. At the end of cleaning operations, simply remove the hose from the inlet valve to switch the system off.


Natural Trendy brushes

The Natural Trendy line is the quintessence of cleaning tools. Premium quality brushes and accessories for those who do not want to compromise.

Cleaning accessories

Sistem Air cleaning accessories offer a complete range to meet all cleaning needs. The high build quality and universality with all central vacuum systems make it an exclusive and sought-after product.

Professional anti-torsion hoses Ultra-resistant and non-deformable. Ready for anything Ergonomic handles Relieve the weight of the hose on the ground







WIRELESS FLISY





sistemair.com

Natural Trendy Brushes

Floor and carpet brush



	Article	Description	Pkg	U.m.	Price
	7736.0	width 36 cm	1	рс	€ 86,00
		Brush with joint and bumper			
Parquet brush					
	Article	Description	Pkg	U.m.	Price
	0 7735.0	width 30 cm	1	рс	€ 35,00
		Brush with joint and polishing felt base			
Floor brush					
	Article	Description	Pkg	U.m.	Price
		· · · · · · · · · · · · · · · · · · ·			
	0 7747.1	width 30 cm	1	рс	€ 65,00
		Brush with joint and Natural bristles			
Mattress and tapestry	brush				
	Article	Description	Pkg	U.m.	Price
-	7744.0	with velvet comb	1	рс	€ 19,00
		Brush without bristles for regular surfaces			
Clothes brush					
ciotiles brush	Article	Description	Pkg	U.m.	Price
		-	-	-	
	○ 7742.0	extra soft for all fabrics	1	рс	€ 33,00
		Long natural bristle brush for clothes			
Dusting brush					
4	Article	Description	Pkg	U.m.	Price

-	1.16
C	- 8

	Article	Description	РКУ	0.111.	Price
(7743.0	ideal for cleaning furniture	1	рс	€ 18,00
		Triangular brush with natural bristles			

Radiator brush

		k	8	
1	ľ	l	Ē.	
ĺ	1	1	٢	

Article	Description	Pkg	U.m.	Price
○ 7746.0	perfect for radiators and decorative radiators	1	рс	€ 16,00
	To be used in combination of Art. 7745.0			

Corner noozle

Article	Description	Pkg	U.m.	Price
0 7745.0	extra long 35 cm	1	рс	€ 12,70
	Fine nozzle for suction in difficult places			

Standard brushes

Open Space Brush

0	Article	Description	Pkg	U.m.	Price
	7047.0	width 37 cm	1	рс	€ 72,00
		Open Space Brush			
Turbo carpet beater brush					
	Article	Description	Pkg	U.m.	Price
	7034.0	width 28 cm	1	рс	€ 159,00
		With Turbo Technology. No batteries required			
80° brush					
8	Article	Description	Pkg	U.m.	Price
	7047.9	width 30 cm	1	рс	€64,00
TRADITI CONTRACTOR OFFICE		With 180° joint			
et brush					
-	Article	Description	Pkg	U.m.	Price
	7049.0	for mantle cleaning	1	рс	€ 85,00
		Bridle type with soft synthetic bristles			
Brush for liquids	Article	Description	Pkg	U.m.	Price
		width 30 cm			€ 49,0
No. of Concession, Name of Street, or other	• 7033.1	With rubber bristles	1	рс	€ 49,0
Brush for pipes and bea	ıms				
	Article	Description	Pkg	U.m.	Price
	7033.2	Ideal for dusting pipes and beams	1	рс	€ 113,0
		Elbow with bristles			
Tapestry turbo brush					
	Article	Description	Pkg	U.m.	Price
	07033.3	width 16 cm	1	рс	€ 99,0
		With Turbo Technology. No batteries required			

Cleaning accessories

Flexible pipes

Wireless on/off Flisy 2 flexible pipes



Article	Description	Pkg	U.m.	Price
7037.7W	7 m pipe	1	рс	€ 255,00
7037.9W	9 m pipe	1	рс	€ 270,00
	Wireless switching hose			

Flexible pipe



Article	Description	Pkg	U.m.	Price
7037.7	7 m pipe	1	рс	€ 70,00
7037.9	9 m pipe	1	рс	€ 89,00
7037.18	18 m pipe	1	рс	€ 186,00
	Hose without fittings			

Mélange hose cover

	Article	Description	Pkg	U.m.	Price
	7037.1	7 m pipe	1	рс	€ 78,00
	7037.4	9 m pipe	1	рс	€ 100,00

Hose cover for flexible hose

Extensions

Rigid extension



Article	Description	Pkg	U.m.	Price
0 7040.0	Chrome-plated	1	рс	€ 42,50
	Standard cleaning tube			

Telescopic extension

					0
			Ì	1	
	é	1	2		
V	p e				

Article	Description	Pkg	U.m.	Price
0 7040.1	Chrome-plated	1	рс	€ 64,00
	Length-adjustable tube			

Basic extension



Article	Description	Pkg	U.m.	Price
7040.2	Plastic	1	рс	€ 25,50
	Basic cleaning tube			

Handgrip

Curved fitting

	Article	Description	Pkg	U.m.	Price
	0 7039.0	Chrome-plated	1	рс	€ 37,00
		With pressure regulator			
Ergonomic curved fittir	ıg				
	Article	Description	Pkg	U.m.	Price
and the second se	7039.1	Plastic	1	рс	€ 26,50
		With pressure regulator			
Flisy 2 on/off fitting	((1.				
-	Article	Description	Pkg	U.m.	Price
	○ 7039.10W	Wireless	1	рс	€ 207,00
		on/off wireless system			
System Tech Flisy 2	(i.				
	Article	Description	Pkg	U.m.	Price
	○ 7039.4W	Wireless	1	рс	€ 233,00
	0 1039.400				
System Tech Flisy 2* re		on/off system with wireless receiver			
System Tech Flisy 2* re		Description Wireless receiver *If several receivers are to be installed, only one handle	Pkg 1	U.m. pc	Price € 140,00
Fittings	ceiver 🛜 Article	Description Wireless receiver	1		
Fittings	ceiver 🛜 Article	Description Wireless receiver *If several receivers are to be installed, only one handle	1		
Fittings	Article	Description Wireless receiver *If several receivers are to be installed, only one handle can also be used. Description	1	pc	€ 140,00
Fittings	Article Article Article Article	Description Wireless receiver *If several receivers are to be installed, only one handle can also be used.	1 Pkg	pc U.m.	€ 140,00
Fittings Fitting pipe/inlet	Article Article 3301.12 Article 7038.0M	Description Wireless receiver *If several receivers are to be installed, only one handle can also be used. Description With metal ring	1 Pkg	pc U.m.	€ 140,00
Fittings Fitting pipe/inlet	Article Article 3301.12 Article 7038.0M	Description Wireless receiver *If several receivers are to be installed, only one handle can also be used. Description With metal ring	1 Pkg	pc U.m.	€ 140,00
Fittings Fitting pipe/inlet	Article Article Article Article Article To38.0M	Description Wireless receiver *If several receivers are to be installed, only one handle can also be used. Description With metal ring For standard switching	1 Pkg 1	pc U.m. pc	€ 140,00 Price € 15,00 Price
Fittings Fitting pipe/inlet	Article	Description Wireless receiver *If several receivers are to be installed, only one handle can also be used. Description With metal ring For standard switching Description	1 Pkg 1 Pkg	pc U.m. pc U.m.	€ 140,00 Price € 15,00 Price
Fittings Fitting pipe/inlet Extension for flexible ho	Article	Description Wireless receiver *If several receivers are to be installed, only one handle can also be used. Description With metal ring For standard switching Description Rubber	1 Pkg 1 Pkg	pc U.m. pc U.m.	€ 140,00 Price € 15,00 Price
System Tech Flisy 2* re System Tech Flisy 2* re Fittings Fitting pipe/inlet Extension for flexible ho Security object holder	Article	Description Wireless receiver *If several receivers are to be installed, only one handle can also be used. Description With metal ring For standard switching Description Rubber	1 Pkg 1 Pkg	pc U.m. pc U.m.	€ 140,00 Price € 15,00

Accessories holder

Mini accessories holder



ArticleDescriptionPkgU.m.Price7041.1To be hung on the wall1pc€ 35,00For flexible hose and 4 accessories

Maxi accessories holder



Article	Description	Pkg	U.m.	Price
🔵 art. 7041.0	To be hung on the wall	1	рс	€ 64,00
	For flexible hose and 10 accessories			

Accessories trolley




Article	Description	Pkg	U.m.	Price
🔵 art. 7041.2	With weels	1	рс	€ 430,00
	For flexible hose and accessories			

Special cleaning kit

Oven accessory kit

Accessory kit for oven cleaning, with insulated handle to protect against heat. This allows use even when the plates are still hot. Modular, extendable handle for cleaning industrial ovens up to 3 m deep.

Earthing can be connected with the included accessory for suction of materials generating electrostatic charge or at risk of explosion such as flour.



Brushes and accessories Ø 40

Pipes and fittings

Flexible pipe

)	Article	Description	Pkg	U.m.	Price
	7 037.2	Ø 40 mm length 10 m	1	рс	€ 175,00
Fitting flexible pipe/hand	grip				
	Article	Description	Pkg	U.m.	Price
	• 7038.1	Fitting flexible pipe/handgrip Ø 40	1	рс	€ 18,00
Swivel fitting	Article	Description	Pkg	U.m.	Price
	• 7038.2	Swivel fitting pipe/inlet Ø 40	1	рс	€ 24,50

Chrome plated tubes

Pair of chrome-plated pipes

C.	=	Article	Description	Pkg	U.m.	Price
/	/	0 7039.20	Extension Ø 40	1	рс	€ 62,00

Brushes

Floor brush

	Article	Description	Pkg	U.m.	Price
	• 7047.2	Width 48 cm	1	рс	€ 60,00
Dusting brush					
	Article	Description	Pkg	U.m.	Price
r	• 7047.3	Round brush	1	рс	€19,50
Corner noozle					
	Article	Description	Pkg	U.m.	Price
	• 7047.4	Flat top	1	рс	€ 16,00
Liquid brush					
	Article	Description	Pkg	U.m.	Price
-	07033.8	With rubber bristles	1	рс	€ 96,00



On/off Flisy 2 cleaning kit



Flisy 2 basic cleaning kit 🛜



Article	Description	Pkg	U.m.	Price
○ 7530.7W	Cleaning kit with 7 m wireless on/off hose	1	рс	€ 313,00
○ 7530.9W	Cleaning kit with 9 m wireless on/off hose	1	рс	€ 324,00

Flisy 2 Smart cleaning kit 🔶



Article	Description	Pkg	U.m.	Price
○ 7532.7W	Cleaning kit with 7 m wireless on/off hose	1	рс	€ 410,00
○ 7532.9W	Cleaning kit with 9 m wireless on/off hose	1	рс	€ 426,00

Flisy 2 Deluxe cleaning kit 🛜



Article	Description	Pkg	U.m.	Price
○ 7531.9W	Cleaning kit with 9 m wireless on/off hose	1	рс	€ 525,00

		BASIC	SMART	DELUXE
		7530.7W 7 m pipe	7532.7W 7 m pipe	-
		7530.9W 9 m pipe	7532.9W 9 m pipe	7531.9W 9 m pipe
/ _* 0	Flisy 2 7/9 m on/off hose	1	1	\checkmark
B	Mini accessories holder for 4 pcs	1	-	-
	Maxi accessories holder for 10 pcs	_	1	1
ß	Dusting brush with natural bristles	✓	✓	1
P	Corner noozle	✓	1	1
	Chrome-plated rigid extension	✓	✓	_
8	Floor brush Natural	✓	_	1
	Floor and Carpet Brush Natural	_	1	1
	Clothes brush with bristles Natural	-	1	1
A	Mattress & tapestry brush Natural	-	1	1
Æ	Security object holder	_	1	-
	Chrome-plated telescopic extension	-	-	1
Ø	Radiator brush Natural	-	-	1
	Mèlange hose cover	_	_	1

Standard cleaning kit

Article

7530.9

0 7530.7

 \bigcirc

Description

Cleaning kit with standard 7 m hose

Cleaning kit with standard 9 m hose



Pkg

1

1

U.m.

рс

рс

Price

€ 147,00

€ 156,00

Basic cleaning kit



Smart cleaning kit



Deluxe cleaning kit



Article	Description	Pkg	U.m.	Price
7532.7	Cleaning kit with standard 7 m hose	1	рс	€ 280,00
7532.9	Cleaning kit with standard 9 m hose	1	рс	€ 273,00

Article	Description	Pkg	U.m.	Price
O 7531.9	Cleaning kit with standard 9 m hose	1	рс	€ 400,00

	BASIC	SMART	DELUXE
	7530.7 7 m pipe	7532.7 7 m pipe	-
	7530.9 9 m pipe	7532.9 9 m pipe	7531.9 9 m pipe
Flexible hose with standard fittings 7/9 m	<i>✓</i>	<i>✓</i>	✓*
Mini accessories holder for 4 pcs	<i>✓</i>	-	-
Maxi accessories holder for 10 pcs	-	<i>✓</i>	<i>✓</i>
Dusting brush with natural bristles	<i>✓</i>	<i>✓</i>	<i>✓</i>
Corner noozle	<i>✓</i>	<i>✓</i>	<i>✓</i>
Chrome-plated rigid extension	1	✓	-
Floor brush Natural	1	_	1
Floor and Carpet Brush Natural	-	<i>s</i>	1
Floor and Carpet Brush Natural	-	1	1
Mattress & tapestry brush Natural	-	1	1
Security object holder	-	1	-
Chrome-plated telescopic extension	-	-	1
Radiator brush Natural	-	_	1
Mèlange hose cover	_	_	1
	Mini accessories holder for 4 pcsMaxi accessories holder for 10 pcsDusting brush with natural bristlesCorner noozleChrome-plated rigid extensionFloor brush NaturalFloor and Carpet Brush NaturalFloor and Carpet Brush NaturalMattress & tapestry brush NaturalSecurity object holderChrome-plated telescopic extensionRadiator brush Natural	7530.7 7 m pipe 7530.9 9 m pipe 7530.9 9 m pipe Flexible hose with standard fittings 7/9 m Mini accessories holder for 4 pcs Maxi accessories holder for 10 pcs Dusting brush with natural bristles Corner noozle Chrome-plated rigid extension Floor brush Natural Floor and Carpet Brush Natural Floor and Carpet Brush Natural Security object holder Chrome-plated telescopic extension Radiator brush Natural	7530.7 7 m pipe 7532.7 7 m pipe 7530.9 9 m pipe 7532.9 9 m pipe Flexible hose with standard fittings 7/9 m ✓ Mini accessories holder for 4 pcs ✓ Maxi accessories holder for 10 pcs – Dusting brush with natural bristles ✓ Corner noozle ✓ Chrome-plated rigid extension ✓ Floor and Carpet Brush Natural – Floor and Carpet Brush Natural – Kattress & tapestry brush Natural – Security object holder – Radiator brush Natural – Chrome-plated telescopic extension –


Special separator

To preserve the efficiency of the system, special separators must be used if it is necessary to suck in liquids or cold ash. They are used as required and connect directly to the plant's suction inlets.

Liquid separator with brush

It is equipped with a special floating mechanism that stops liquids and dust when the level is reached, leaving the hose and the central vacuum cleaner dry.

It allows suction of up to 20 l of liquids. It is supplied with a brush with rubber bristles and a hose to be inserted into the suction inlets. To vacuum liquids, connect the Ø 32 mm hose in use for normal cleaning operations to the separator.

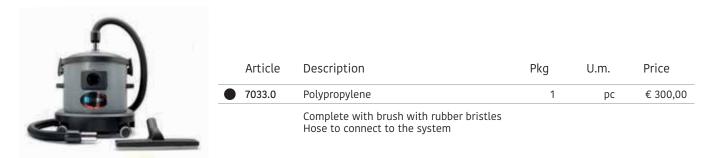

Ashes separator

Ashes represent a danger to the motor of the central vacuum cleaner, which is why it is necessary to use the special stainless steel separator equipped with a special REI 60 filter (see spare parts section page 133) for cleaning stoves, chimneys and boilers. The ash sucked in must be cold.

The capacity of the separator is 36 l and it is supplied complete with hose to be inserted into the suction inlets. To vacuum the ash, connect the \emptyset 32 mm hose in use for normal cleaning operations to the separator.



⑦ 7033.7 Stainless steel 1 pc € 307,000		Article	Description	Pkg	U.m.	Price
	\bigcirc	7033.7	Stainless steel	1	рс	€ 307,00

Hose to connect to the system

Express yourself in cleaning

Filter cartridges



Aluminium fibre filter

	Article	Description	Pkg	U.m.	Price
	1610.0R	Conical polyester and aluminium filter	1	рс	€ 100,00
		For central vacuum cleaners			
		Tecno Prime Tecno R-Evolution			
	Article	Description	Pkg	U.m.	Price
\bigcirc	1610.0	Polyester filter	1	рс	€ 81,00
		<i>For central vacuum cleaners</i> Tecno Evox Tecno Style Tecno Activa Tecno Evolution Linea Color SA5			
	Article	Description	Pkg	U.m.	Price
		 1610.0R Article 1610.0 	 1610.0R Conical polyester and aluminium filter For central vacuum cleaners Tecno Prime Tecno R-Evolution Article Description 1610.0 Polyester filter For central vacuum cleaners Tecno Evox Tecno Style Tecno Evolution Linea Color SA5 	 1610.0R Conical polyester and aluminium filter 1 For central vacuum cleaners Tecno Prime Tecno R-Evolution Article Description Pkg 1610.0 Polyester filter 1 For central vacuum cleaners Tecno Evox Tecno Style Tecno Activa Tecno Evolution Linea Color SA5 Article Description Pkg 	 1610.0R Conical polyester and aluminium filter 1 pc For central vacuum cleaners Tecno Prime Tecno R-Evolution Article Description Pkg U.m. 1610.0 Polyester filter 1 pc For central vacuum cleaners Tecno Evox Tecno Style Tecno Style Tecno Style Tecno Activa Tecno Evolution Linea Color SA5 Article Description Pkg U.m.



ALICLE	Description	Рку	0.111.	Price
1610.1	Polyester filter	1	рс	€ 93,00
	For central vacuum cleaners			
	SA200 SA300 SA400			

Separator line filters


Polyester filter	1		
	1	рс	€ 160,00
For central vacuum cleaners			
LT80 Tecno Block Max			
Description	Pkg	U.m.	Price
Polyester filter	1	рс	€ 325,00
For central vacuum cleaners			
LT160			
	Tecno Block Max Description Polyester filter For central vacuum cleaners	Tecno Block Max Description Pkg Polyester filter 1 For central vacuum cleaners 1	Tecno Block MaxDescriptionPkgU.m.Polyester filter1pcFor central vacuum cleaners

Mini line Filter

22	-		
-	-	-	

Article	Description	Pkg	U.m.	Price
1610.5	Polyester filter	1	рс	€ 64,00
	<i>For central vacuum cleaners</i> Tecno Style Mini Tecno Activa Mini Tecno Evolution Mini Silent Mini			

SA7 Filter



Tecno Star filter



Article	Description		Pkg	U.m.	Price
1610.7	Polyester filter	1	рс	€127,00	
	For central vacuum clear	ners			
	Tecno Star Dual Power Tecno Star	Revo Block 500 Revo Job			

Revo Block filter



Article	Description		Pkg	U.m.	Price
1610.7R	Polyester filter		1	рс	€ 186,00
	For central vacuum cleaners				
	Revo Block 700 Revo Block 700 Plus Revo Block 1000	Revo Block 1200 Revo Block 1500 Revo Block 1800			

Compact line filter

Article	Description		Pkg	U.m.	Price
1610.9	Polyester filter		1	рс	€48,00
	For central vacuum	n cleaners			
	Wolly 2 Wolly	T-Box T-Smart			

Micro filter

Article	Description	Pkg	U.m.	Price
610.15	Sponge filter	1	рс	€ 38,00
	For central vacuum cleaners			
	Sistem Cube			
Article	Description	Pkg	U.m.	Price
1610.16	Sponge filter	1	рс	€ 41,00
	For central vacuum cleaners			
	Sistem Test			


Fireproof cloth filter

Article	Description	Pkg	U.m.	Price
0 1610.10	Fireproof cloth filter	1	рс	€ 72,00
	For central vacuum cleaners			
	Ashes separator			

Spares

Bags

36 litre bags



20 litre bags

	Article	Description	Pkg	U.m.	Price
1 1 2	1614.1	Plastic bag (pack of 20)	1	рс	€ 21,00
		For central vacuum cleaners			
a series of the		Color line White line			

Tecno Star bags

	Article	Description		Pkg	U.m.	Price
\bigcirc	1614.2	Plastic bag (pack of 20)		1	рс	€ 70,00
		For central vacuum cleaner	s e separatori polver	i		
		Tecno Star Tecno Star Dual Power Revo Block 500	Tecno Block LT50 LT80			

Separator bags

Article	Description		Pkg	U.m.	Price
0 1614.3	Plastic bag (pack of 20)		1	рс	€ 90,00
	For central vacuum cleaners	e separatori polveri			
	Revo Block 700/700 Plus Revo Block 1000 Revo Block 1200 Revo Block 1500	Revo Block 1800 LT 160 Industrial Clean Bi	g		

Bags with tensioners

1	nd	
Ļ		

Article	Description	Pkg	U.m.	Price
1614.4	Plastic bag (pack of 10)	1	рс	€ 51,00
	For central vacuum cleaners			
	Universal* *except Wolly, Tecno Star, T-Box, Sistem Cube and the separate	ors		

Bi-Vac bags



Article	Description	Pkg	U.m.	Price
0 1614.5	Microfibre bag (pack of 5)	1	рс	€ 47,00
	<i>For central vacuum cleaners</i> Tecno Prime Tecno R-evolution T-Smart			

Cube bags



Article	Description	Pkg	U.m.	Price
🥚 1614.15	Paper bags (pack of 10)	1	рс	€ 42,00
	For central vacuum cleaners			
	Sistem Cube			

Wolly bags



Article	Description	Pkg	U.m.	Price
8220.0	Microfibre bags (pack of 10)	1	рс	€ 51,00
	For central vacuum cleaners			
	Wolly 2 Wolly			

T-Box bags



Article	Description	Pkg	U.m.	Price
0 8220.1	Microfibre bags (pack of 10)	1	рс	€ 51,00
	For central vacuum cleaners			
	T-Box			

Jolly bags



Article	Description	Pkg	U.m.	Price
8402.0	Paper bags (pack of 5)	1	рс	€ 18,00
	For central vacuum cleaners			
	Jolly People Jolly Contact			

FREQUENT QUESTIONS

What is special about a central vacuum system compared to household appliances?

The central vacuum cleaner expels without letting them flow back in. Give a try: put your hand behind an

Some advertisements for vacuum appliances say that the filter blocks over 99% of pollutants. Can I be sure of this?

The filter is not a plug, and to perform through. If it retained all the dust, it would not even vacuum up a crumb.

Should I put an inlet valve in every room?

No, a single inlet valve cleans approximately 35 m2 of surface area. Simply

Why should I choose it over a vacuum cleaner or robot?

It is the only system in the world that rooms. It is powerful, energy-saving, done, lasts forever.

I have touchy neighbours and I don't want to cause trouble: do they risk finding their balcony full of dust?

No, only filtered air comes out of the external vent. Micro-dust, invisible the atmosphere without creating a

Is it only suitable for luxury or large houses? Is it very expensive?

vary depending on the square footage to a high-end appliance.

Where does the dirt go?

emptied approximately twice a year.

Can it get clogged?

No, what passes through the small hose slides out into the big one. The cleaning hose is 3 cm in diameter 5 cm!

Will I have to clean the pipes?

cleaning the pipes because the vacuumed air creates a cyclone that keeps the dirt in the centre, avoiding

GENERAL TERMS AND CONDITIONS OF SALE

DELIVERY

The delivery terms, specified in the order confirmation, are to be considered indicative and in any case shall be understood as relating to the delivery of the goods to the forwarding agent, who will forward them to their destination. Claims for damages resulting from delays in the delivery of goods shall not be accepted.

RETENTION OF TITLE

The goods are sold under a Retention of Title Agreement in accordance with Articles 1523 et seq. of the Civil Code; therefore, until the full payment of the price, they shall remain the property of Tecnoplus s.r.l.

PAYMENTS

Payments shall be made in the manner and on the terms stated in the invoice: in the event of delay, interest shall be charged at the official discount rate plus 3 points, commencing on the day following the day agreed for payment. Any objections to the goods shall not exempt the customer from making payment within the agreed terms. Tecnoplus s.r.l. invoices shall be deemed accepted if not contested by letter with return receipt within 8 days of receipt.

TRANSPORT

The goods travel at the total risk and peril of the purchaser, even if sent carriage paid. Therefore, in the event of delays, shortages, damage, theft, etc., complaints must be addressed to the carrier alone and solely responsible. Transport charges are applied according to the terms of the order.



OUANTITATIVES

Quantities may be decreased or increased without notice depending on availability and in compliance with the original packaging or wrapping. A surcharge of 3% on the price will be charged on all articles in quantities less than the standard packaging as a fee for non-standard handling. Items in this price list may be changed or removed from sale at the company's discretion.

RETURNS

Returns of goods without prior written authorisation from Tecnoplus s.r.l. are not accepted. Unauthorised returns of goods and charging of non-agreed transport costs will be sent back to the sender.

COMPETENT COURT

The Court of Pavia shall have jurisdiction over any disputes.

List prices are VAT excluded. Tecnoplus S.r.l reserves the right to make technical, chromatic or aesthetic changes to the products mentioned in this document at any time. All images are included for illustrative purposes and are the property of Tecnoplus S.r.l., their use is subject to approval. By its nature, the printed edition may not be up to date.

We recommend that you consult the latest revision at sistemair.it/download







27020 Gravellona Lomellina (PV) ITALIA - Via Cilavegna, 53 Tel. + 39 0381 650082 - WhatsApp +39 340 4090146 - info@sistemair.com

